



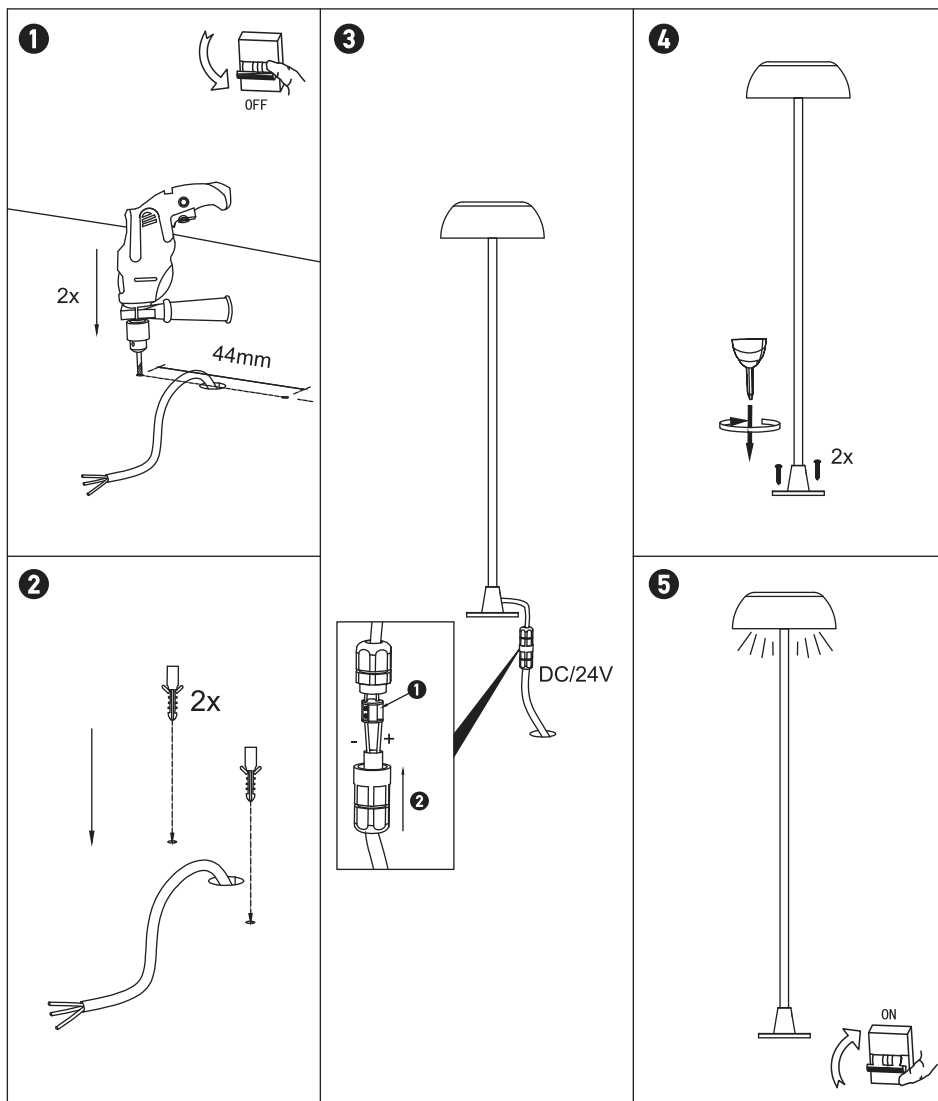

Connecting the Terminal Block

Connect main supply (brown - Live, blue - Neutral) into terminal block making sure all connections are tight.



OUTDOOR BOLLARD

E566

Please read instructions before commencing installation and retain for future reference.

SPECIFICATIONS

- **Lamp Type:** LED | 4W | 3000K | CRI 94
- **Material:** Concrete - Stainless Steel - Tempered Glass
- **Ingress Protection:** IP65 Protection against entry of solid objects greater than 12mm in diameter.

INSTALLATION INSTRUCTIONS



Electrical products can cause death, injury, or property damage. Maintenance and installation should only be carried out by a professional electrician.

- Ensure the main supply is switched off.
- Follow the instructions step by step.
- Connect the positive and negative ground wires, and connect the power cord.
- Use the waterproof connector IP68 in the correct usage for tight connection.
- Making sure all connections are tight.
- Reconnect power.

WARNING



Make sure that the products are installed properly before connecting to electricity. Do not cover the luminaire. Do not exceed the maximum wattage rating of the lamp. If the light source is contained in this luminaire (integrated LED), it shall only be replaced by the manufacturer, his service agent, or a similarly qualified person.

