

3-PHASE TRACK SPOT LIGHT S238

Please read instructions before commencing installation and retain for future reference.

SPECIFICATIONS


- **Lamp Type:** LED | 20W | 2700K, 3000K, 4000K | CRI90 | Beam Angle 100°
- **Material:** Aluminium | PC Diffuser
- **Ingress Protection:** IP 20 Protection against entry of solid objects greater than 12mm in diameter.

INSTALLATION INSTRUCTIONS

- ⚠** Electrical products can cause death, injury, or property damage. Maintenance and installation should only be carried out by a professional electrician.
- Ensure the main power supply is turned off.
 - Complete the 3-phase track system according to your preferences.
 - Connect the wires and power cord following the system installation manual.
 - Make sure all connections are secure and tight.
 - Install the 3-phase spot in your desired position by inserting it into the tracks.
 - Move the 3-phase switch to position 1, 2, or 3 as follows:
 - Position 1: The spot connects to the first phase (L1) of the system.
 - Position 2: The spot connects to the second phase (L2) of the system.
 - Position 3: The spot connects to the third phase (L3) of the system.
 - Move the CCT switch to your preferred position.
 - Reconnect the power supply.

WARNING

- ⚠** Make sure that the products are installed properly before connecting to electricity. Do not cover the luminaire.
- Do not exceed the maximum wattage rating of the lamp.
- If the light source is contained in this luminaire (integrated LED), it shall only be replaced by the manufacturer, his service agent, or a similarly qualified person.

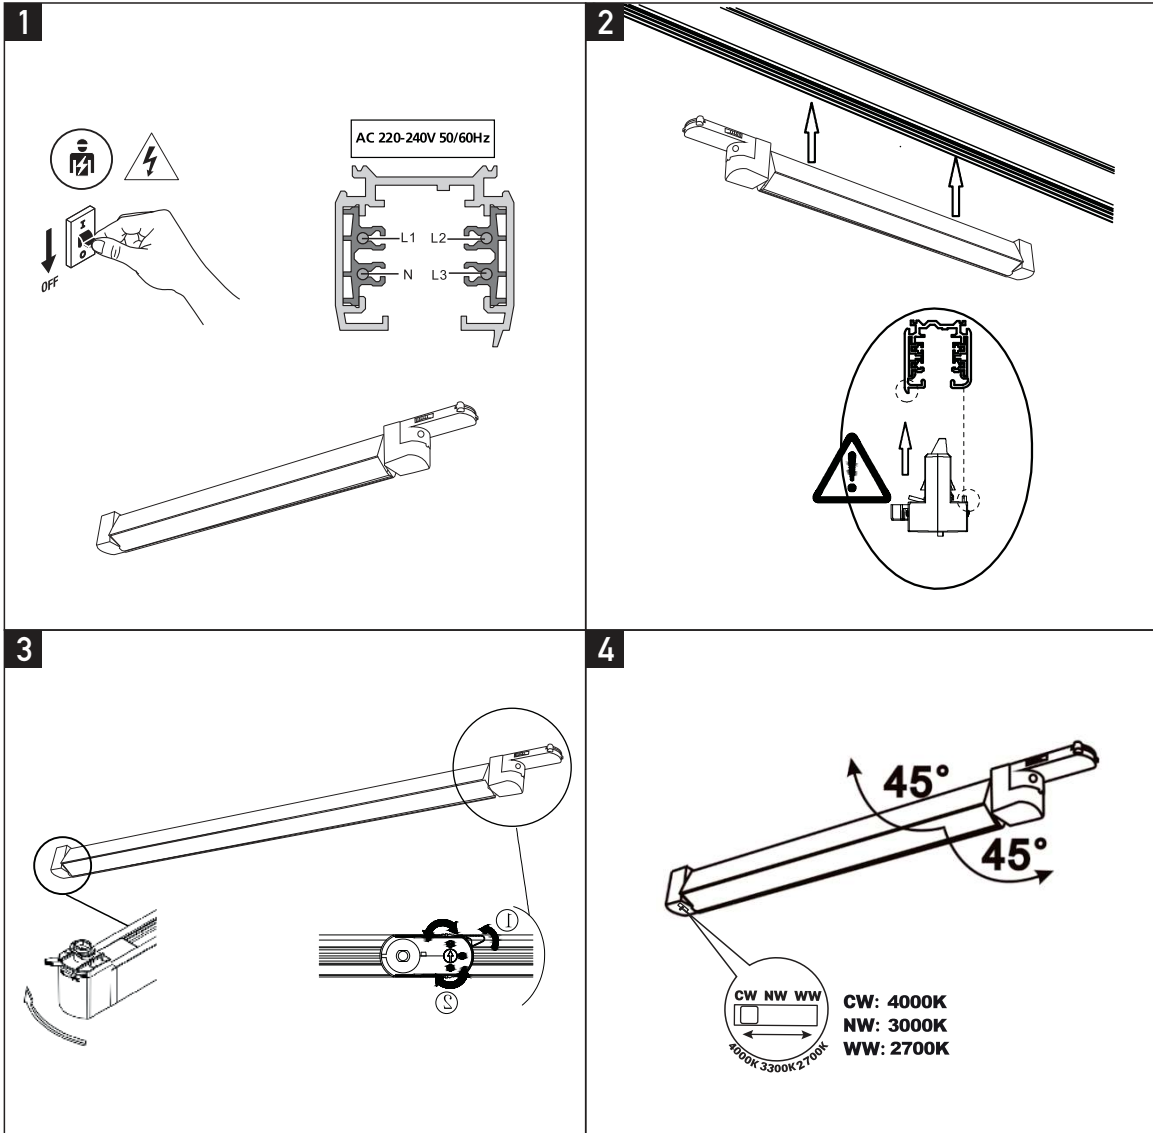

⚠ 3-Phase Switch and why it's useful...

Independent control:

You can turn on different groups of spots from different switches on the wall.

Load balancing:

You divide the power consumption evenly across the three phases to avoid overloading the line.

Flexibility:

You change which lights turn on together, simply by flipping the switch on the spot, without any changes to the wiring.

