Zambelis LIGHTS

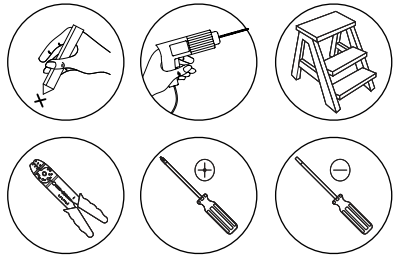

PENDANT LIGHT 20264



Connecting the Terminal Block

Connect main supply (**brown - L**ive, **blue - N**eutral) into terminal block making sure all connections are tight.

6

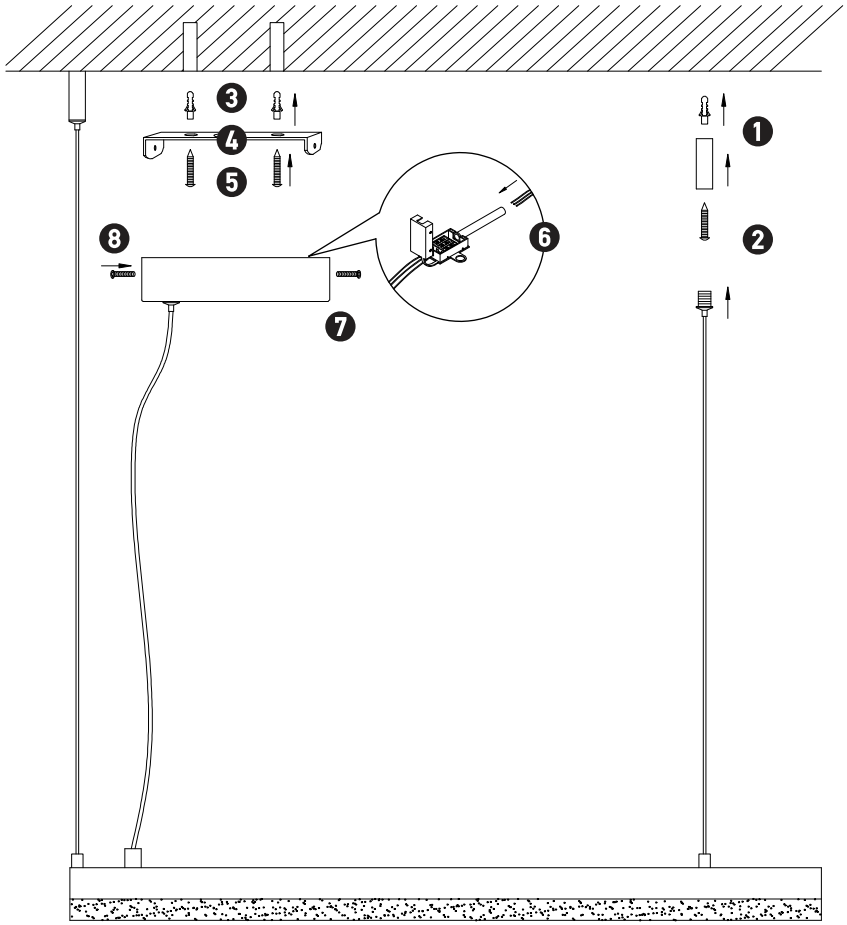

Please read instructions before commencing installation and retain for future reference.

SPECIFICATIONS

- **Fitting:** ALUMINIUM + ACRYLIC.
- **Lamp type:** LED 84W 3000K
- **Ingress Protection:** IP20. Protection against entry of solid objects greater than 12mm in diameter.
- **Quality/Corrosive rating:** QC21
- **Burning period:** 12hrs/24hr cycle. Commercial use, indoor mainly painted or plated metals.
  Not for use in corrosive environments.

INSTALLATION INSTRUCTIONS

⚠ Electrical products can cause death, injury, or damage to property. Installation of this product must be carried out by a qualified electrician.

- Ensure main supply is switched off.
- Insert masonry plugs (1) into mounting surface.
- Fit the wire (2) onto mounting surface with self-tapping screws.
- Insert masonry plugs (3) into mounting surface.
- Fit mounting bracket (4) onto mounting surface with self-tapping screws (5).
- Connect main supply wires to terminal block (6) making sure all connections are tight.
- Fit ceiling plate (7) onto mounting bracket with screws (8).
- Reconnect power.

WARNING

- Not for outdoor use or in wet conditions.

IP20 | 0,5m

RoHS Compliant

27109I2021