Zambelis LIGHTS

24V FLEXIBLE CURVED SYSTEM

Please read instructions before commencing installation and retain for future reference.

⚠ Electrical products can cause death, injury, or property damage.
Maintenance and installation should only be carried out
by a professional electrician.

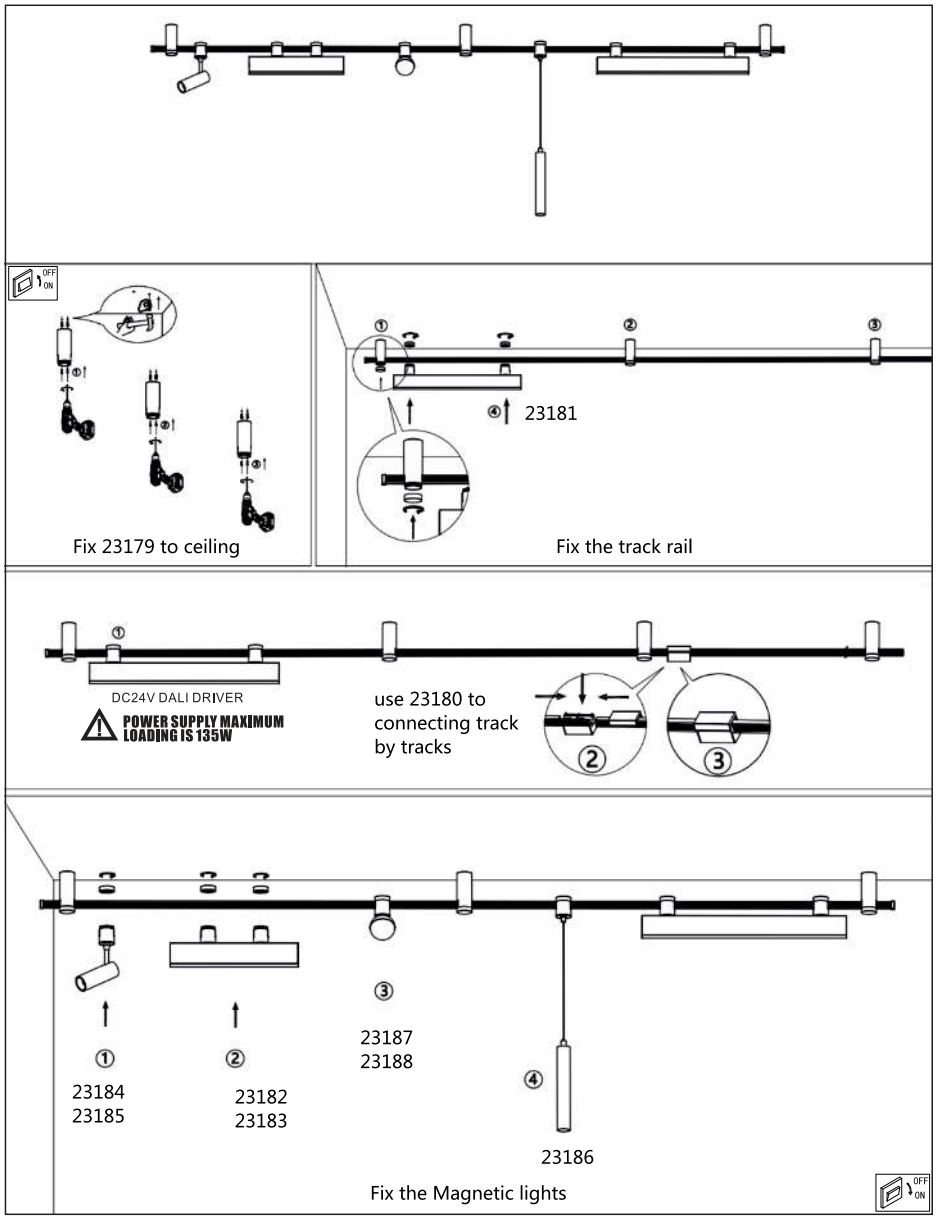

Surface Mounting

Step 01.: Drill the mounting surface and add dowels,
fix the ceiling bases (23179) by screwing them.
Then add the track rail 200cm (23178) or 300cm (23177) and
fix it by screwing the cups of bases.

Step 02.: After the first ceiling base add the BOX with DALI driver (23181),
make a connection between the main power and your 24V Flexible Curved System.
Don't exceed the maximum wattage of 135W per loading with DALI Driver.
Transfer power through your system with track connector (23180) or
with lighting fixture (23182).

Step 04.: I f you need on-off application use feeder for remote driver application (23189) and
one of our suggested drivers from below...
60W On-Off Driver (4052899605527)
120W On-Off Driver (4052899605541)
180W On-Off Driver (4052899605565)
250W On-Off Driver (4062172333467)
Don't exceed the maximum wattage of driver per loading.
Transfer power through your system with track connector (23180) or
with lighting fixture (23182).

Step 05.: When your 24V Flexible Curved System is complete, add the lighting fixtures you need
in the same way you fixed the ceiling bases.

WARNING

⚠ Make sure that the products are installed properly before connecting to electricity.
Do not cover the luminaire.
Do not exceed the maximum wattage rating of the lamp.
If the light source is contained in this luminaire (integrated LED),
it shall only be replaced by the manufacturer, his service agent, or
a similarly qualified person.

DIMMABLE | LED | CRI 90 | IP 20 | 0,5m

16072024