Zambelis LIGHTS

3-PHASE TRACK SPOT LIGHT S236

Please read instructions before commencing installation and retain for future reference.

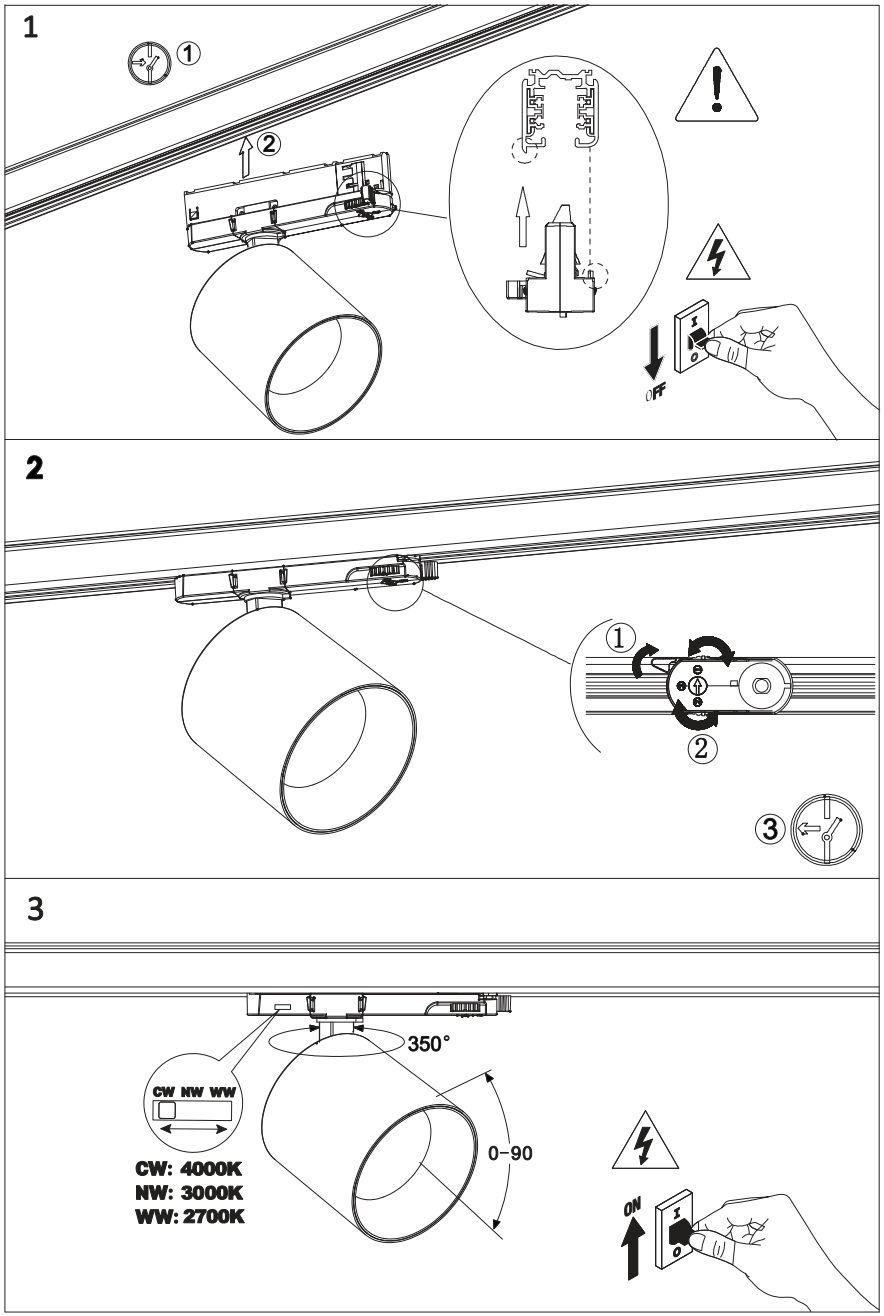

⚠ 3-Phase Switch and why it's useful...

Independent control:
You can turn on different groups of spots from different switches on the wall.

Load balancing:
You divide the power consumption evenly across the three phases to avoid overloading the line.

Flexibility:
You change which lights turn on together, simply by flipping the switch on the spot, without any changes to the wiring.

SPECIFICATIONS

- **Lamp Type:** LED | 10W | 2700K, 3000K, 4000K | CRi90 | Beam Angle 36°
- **Material:** Aluminium
- **Ingress Protection:** IP 20 Protection against entry of solid objects greater than 12mm in diameter.

INSTALLATION INSTRUCTIONS

⚠ Electrical products can cause death, injury, or property damage. Maintenance and installation should only be carried out by a professional electrician.

- Ensure the main power supply is turned off.
- Complete the 3-phase track system according to your preferences.
- Connect the wires and power cord following the system installation manual.
- Make sure all connections are secure and tight.
- Install the 3-phase spot in your desired position by inserting it into the tracks.
- Move the 3-phase switch to position 1, 2, or 3 as follows:
  Position 1: The spot connects to the first phase (L1) of the system.
  Position 2: The spot connects to the second phase (L2) of the system.
  Position 3: The spot connects to the third phase (L3) of the system.
- Move the CCT switch to your preferred position.
- Reconnect the power supply.

WARNING

⚠ Make sure that the products are installed properly before connecting to electricity.
Do not cover the luminaire.
Do not exceed the maximum wattage rating of the lamp.
If the light source is contained in this luminaire (integrated LED), it shall only be replaced by the manufacturer, his service agent, or a similarly qualified person.

LED | CRI 90 | IP 20 | 0,5m

18032026