





Please read instructions before commencing installation and retain for future reference.



Connecting the Terminal Block

Connect main supply (brown - live, blue - neutral, green/yellow - earth) into terminal block making sure all connections are tight.

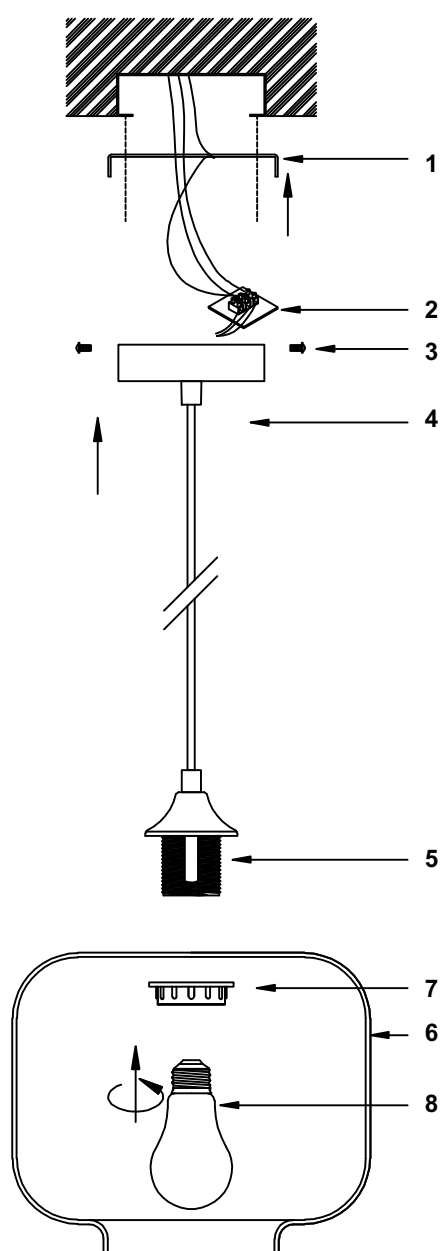

SPECIFICATIONS:

- **Fitting:** Glass
- **Lamp type:** E27 MAX 40W (Excluded).
Lamps and gears excluded unless otherwise specified
- **Protection against electric shock:** CLASS I, . Requires earth connection.
- **Ingress Protection:** IP20. Protection against entry of solid objects greater than 12mm in diameter.
- **Quality/Corrosive rating:** QC21: Burning period: 12hrs/24hr cycle. Commercial use, indoor mainly - painted or plated metals. Not for use in corrosive environments.

INSTALLATION INSTRUCTIONS:

⚠ Electrical products can cause death, injury, or damage to property. Installation of this product must be carried out by a qualified electrician.

- Ensure mains supply is switched off.
- Fit mounting bracket (1) onto mounting surface with self-tapping screws .
- Connect main supply wires to terminal block (2) making sure all connections are tight.
- Fit ceiling cup (4) onto mounting bracket with screws (3).
- Fit lampholder(5) to lampholders(5) and secure with shade rings(7)
- Fit lamp (8) firmly into lampholder.
- Reconnect power.

WARNING:

- Must be installed by qualified electrician
- Do not stare on the lights.

