
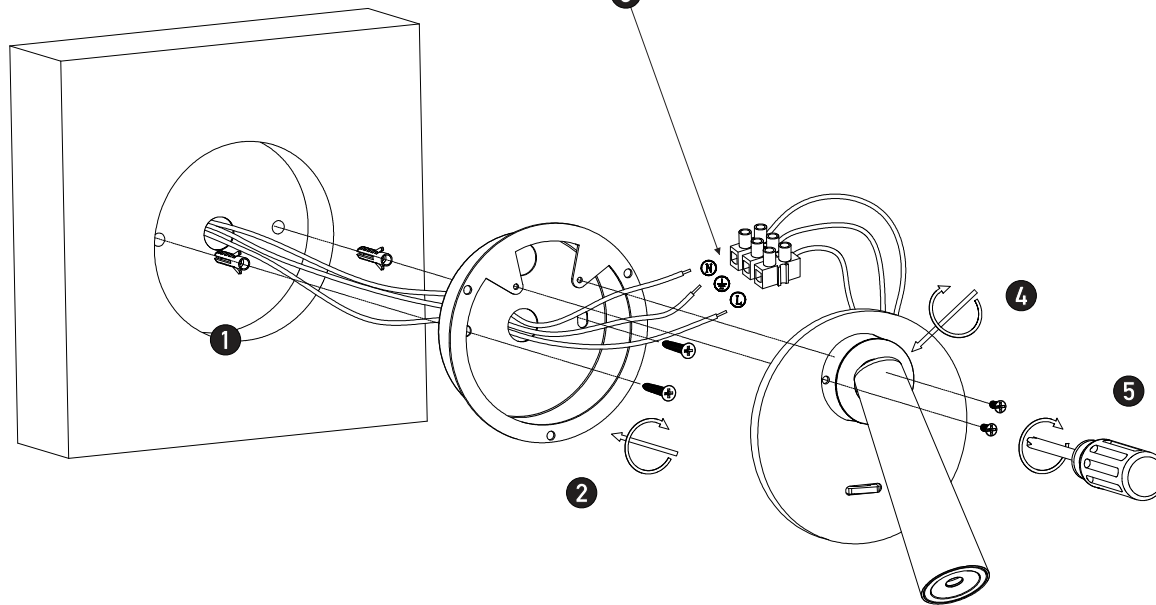




Connecting the Terminal Block

Connect main supply (brown - Live, blue - Neutral) into terminal block making sure all connections are tight.

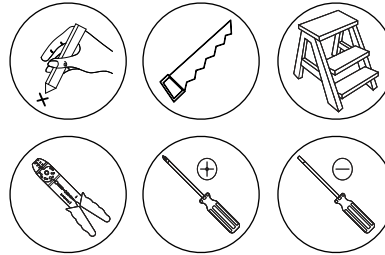

WALL HOTEL LIGHT

H71

Please read instructions before commencing installation and retain for future reference.

SPECIFICATIONS

- **Material:** Metal + Aluminum
- **Lamp type:** LED , 3W , 3000K , 200Lm , CRI 80
- **Ingress Protection:** IP20. Protection against entry of solid objects greater than 12mm in diameter.

INSTALLATION INSTRUCTIONS

! Electrical products can cause death, injury, or damage to property. Maintenance and installation should only be carried out by a professional electrician.

- Ensure main supply is switched off.
- Cutting Hole Ø8.7cm and Depth 3cm required.
- Insert the masonry plugs into the wall surface (1).
- Fit the wall plate into the mounting surface with self-tapping screws (2).
- Connect main supply wires to the terminal block (3) making sure all connections are tight.
- Fit the cover onto the wall plate with screws (4).
- Connect the LED stick with the terminal block and fit it through the cover with the smallest screws (5).
- Reconnect power.
- Push On/Off switch.

WARNING

- Make sure that the products is installed properly before connecting to electricity.
- Do not cover the fitting.
- Not for outdoor use or in wet conditions.
- Do not exceed the maximum wattage rating of the lamp.

