




Connecting the Terminal Block

Connect main supply (brown - Live, blue - Neutral) into terminal block making sure all connections are tight.

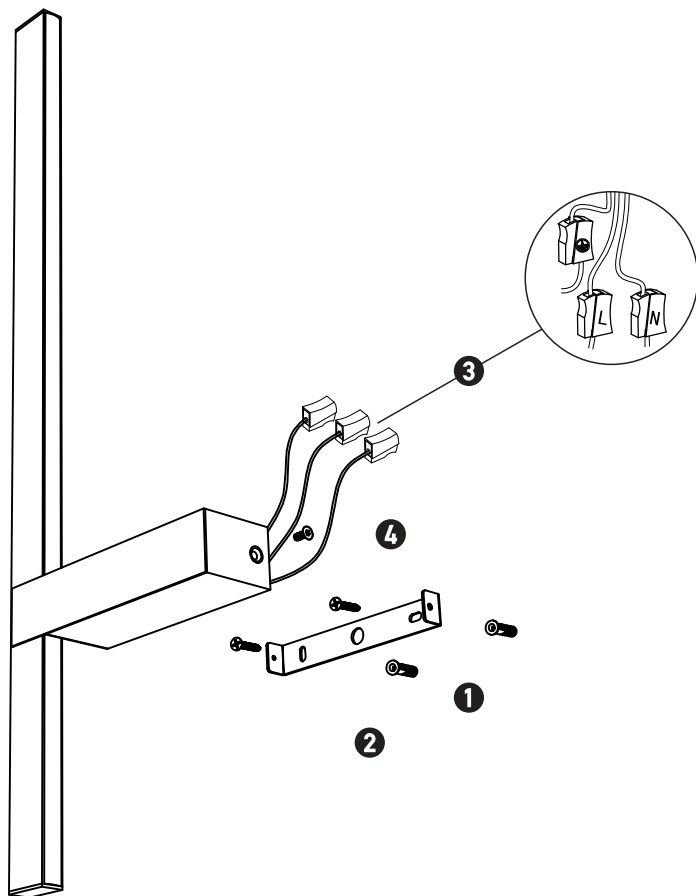

INDOOR WALL LIGHT

2581

Please read instructions before commencing installation and retain for future reference.

SPECIFICATIONS

- **Lamp Type:** LED | 25W | 3000K | CRI 90 | Triac
- **Material:** Metal | Aluminium | PVC
- **Ingress Protection:** IP20 Protection against entry of solid objects greater than 12mm in diameter.

INSTALLATION INSTRUCTIONS

- ⚠ Electrical products can cause death, injury, or property damage. Maintenance and installation should only be carried out by a professional electrician.
- Ensure the main supply is switched off.
- Install the mounting anchors on the wall (1).
- Fix the mounting bracket using M4 self-tapping screws (2).
- Connect the positive and negative ground wires, and connect the power cord (3). Making sure all connections are tight.
- Slide gently and fix with the side screws the wall light to conceal the wiring and mounting bracket (4).
- Reconnect power.

WARNING

- ⚠ Make sure that the products are installed properly before connecting to electricity. Do not cover the luminaire.
- Do not exceed the maximum wattage rating of the lamp.
- If the light source is contained in this luminaire (integrated LED), it shall only be replaced by the manufacturer, his service agent, or a similarly qualified person.

