
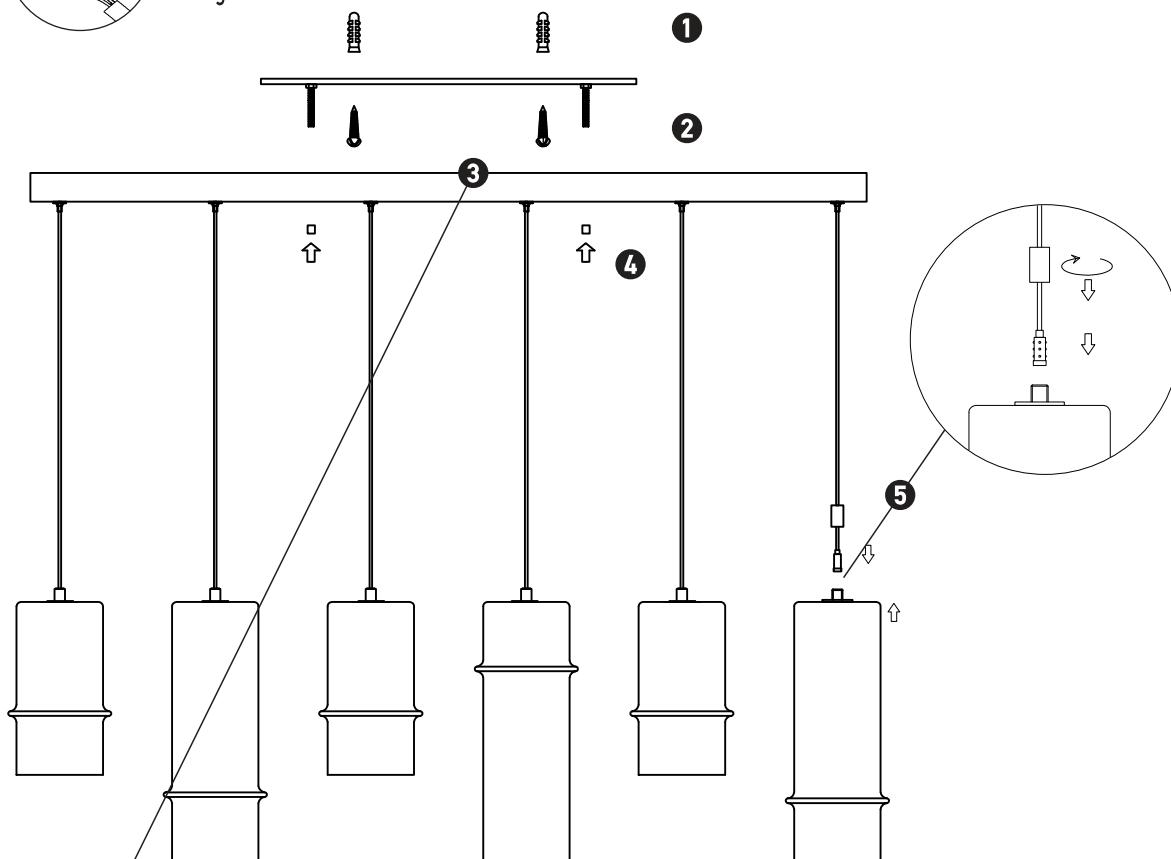


Connecting the Terminal Block

Connect main supply (brown - Live, blue - Neutral) into terminal block making sure all connections are tight.

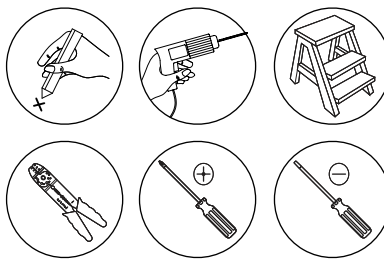

Please read instructions before commencing installation and retain for future reference.

SPECIFICATIONS

- **Lamp Type:** LED | 26W | 3000K | CRI 90 | Step Dimming
- **Material:** Metal | Aluminium | Glass
- **Ingress Protection:** IP20 Protection against entry of solid objects greater than 12mm in diameter.

INSTALLATION INSTRUCTIONS

- ⚠ Electrical products can cause death, injury, or property damage. Maintenance and installation should only be carried out by a professional electrician.
- Ensure the main power supply is turned off.
- Install the mounting anchors on the ceiling (1).
- Secure the mounting plate using M4 self-tapping screws (2).
- Connect the positive and negative ground wires, then connect the power cord (3). Make sure all connections are tight.
- Slide the ceiling base upward and secure it with the decorative screws to conceal the wiring and mounting plate (4).
- Connect the cables with the LED rings through the glasses and follow the diagram to secure all connections (5).
- Reconnect power.

WARNING

- ⚠ Make sure that the products are installed properly before connecting to electricity. Do not cover the luminaire.
- Do not exceed the maximum wattage rating of the lamp.
- If the light source is contained in this luminaire (integrated LED), it shall only be replaced by the manufacturer, his service agent, or a similarly qualified person.

