




Connecting the Terminal Block

Connect main supply (**brown** - Live, **blue** - Neutral) into terminal block making sure all connections are tight.

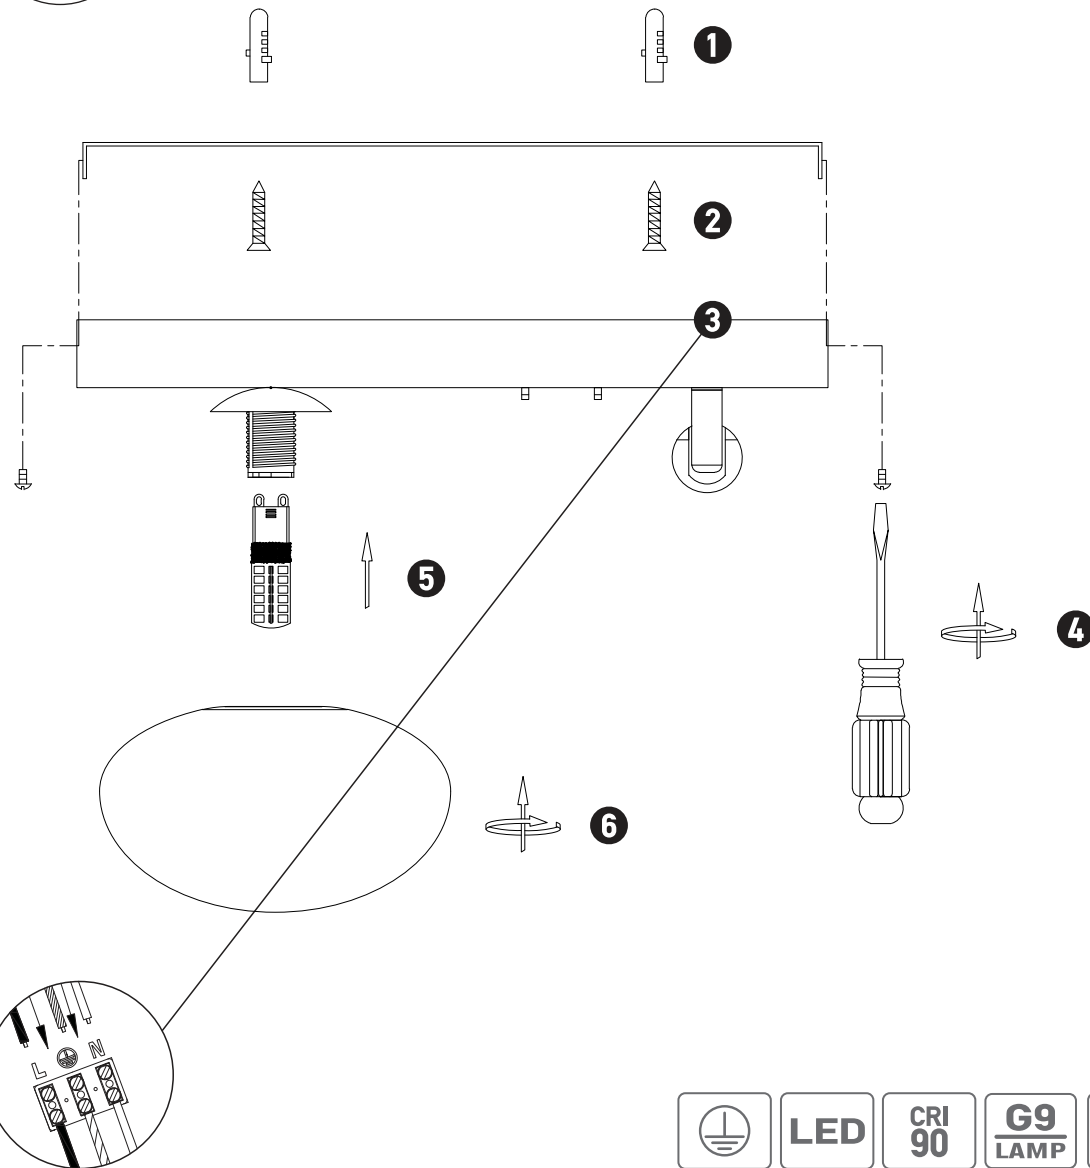

INDOOR WALL LIGHT

25326

Please read instructions before commencing installation and retain for future reference.

SPECIFICATIONS

- **Lamp Type:** LED | 3W | 3000K | CRI 90 | 1x G9 | 5W MAX | Non Dimmable
- **Material:** Metal | Aluminium | Opal Glass
- **Ingress Protection:** IP20 Protection against entry of solid objects greater than 12mm in diameter.

INSTALLATION INSTRUCTIONS

! Electrical products can cause death, injury, or property damage. Maintenance and installation should only be carried out by a professional electrician.

- Ensure the main power supply is turned off.
- Attach the fixing anchors to the wall (1).
- Secure the mounting plate using M4 self-tapping screws (2).
- Connect the positive and negative ground wires, then connect the power cable (3). Verify that all connections are tight.
- Slide the reading light into place and secure it with the side screws to the back, hiding the wiring and mounting plate (4).
- Install the G9 bulb into the lamp holder (5).
- Secure the opal glass by screwing it in place (6).
- Reconnect the power supply.

WARNING

! Make sure that the products are installed properly before connecting to electricity. Do not cover the luminaire. Do not exceed the maximum wattage rating of the lamp. If the light source is contained in this luminaire (integrated LED), it shall only be replaced by the manufacturer, his service agent, or a similarly qualified person.

