
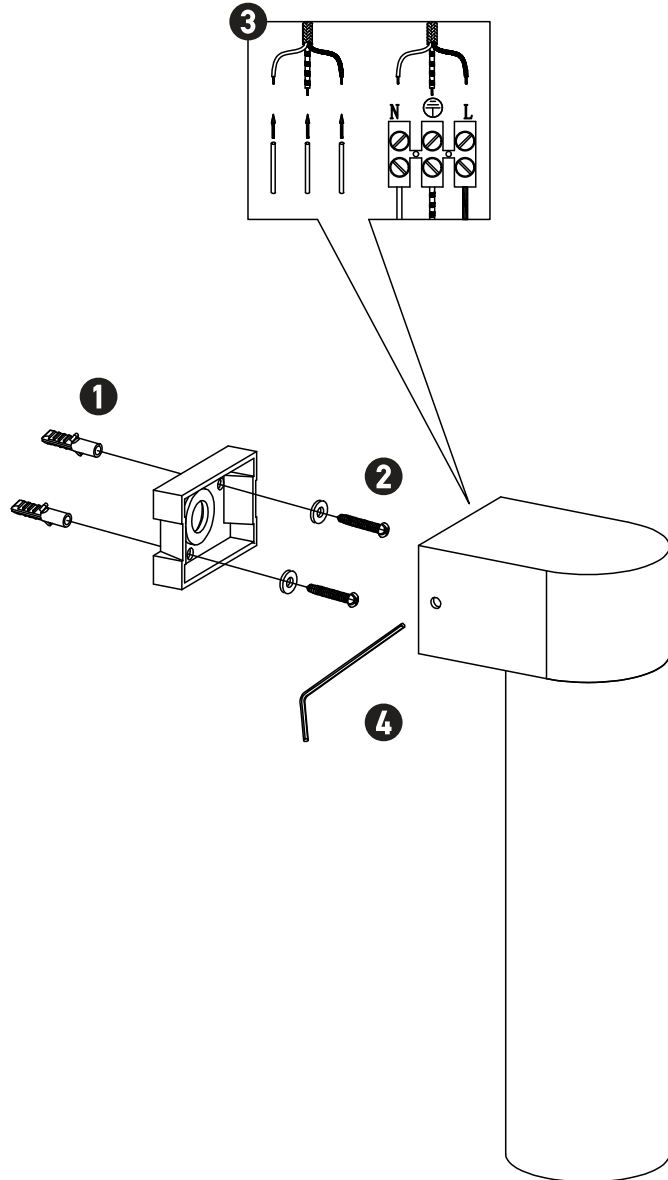


Connecting the Terminal Block

Connect main supply (brown - Live, blue - Neutral) into terminal block making sure all connections are tight.

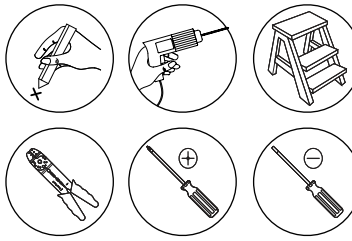

OUTDOOR WALL LIGHT

E415

Please read instructions before commencing installation and retain for future reference.

SPECIFICATIONS

- **Lamp Type:** LED | 5W | 3000K | CRI 90 | Non Dimmable
- **Material:** Aluminium | Glass
- **Ingress Protection:** IP 65 Protection against entry of solid objects greater than 12mm in diameter.

INSTALLATION INSTRUCTIONS

- ⚠ Electrical products can cause death, injury, or property damage. Maintenance and installation should only be carried out by a professional electrician.
- Ensure the main supply is switched off.
- Install the mounting anchors on the wall (1).
- Fix the mounting plate using M4 self-tapping screws (2).
- Connect the positive and negative ground wires, and connect the power cord (3). Making sure all connections are tight.
- Slide and fix with the sided screws the decorative wall cover backward to conceal the wiring and mounting plate (4).
- Reconnect power.

WARNING

- ⚠ Make sure that the products are installed properly before connecting to electricity. Do not cover the luminaire.
- Do not exceed the maximum wattage rating of the lamp.
- If the light source is contained in this luminaire (integrated LED), it shall only be replaced by the manufacturer, his service agent, or a similarly qualified person.

