



OUTDOOR SPIKE LIGHT

E449

Please read instructions before commencing installation and retain for future reference.

SPECIFICATIONS

- **Lamp Type:** LED | 2W | 3000K | CRI 80 | Solar Panel | 3 Lighting Modes
- **Material:** Aluminium | PC Diffuser
- **Ingress Protection:** IP 54 Protection against entry of solid objects greater than 12mm in diameter.

INSTALLATION INSTRUCTIONS



Electrical products can cause death, injury, or property damage. Maintenance and installation should only be carried out by a professional electrician.


- Ensure the main supply is switched off.
- Follow the instructions step by step.
- Connect the positive and negative ground wires, and connect the power cord.
- Making sure all connections are tight.
- Reconnect power.

WARNING



Make sure that the products are installed properly before connecting to electricity. Do not cover the luminaire. Do not exceed the maximum wattage rating of the lamp. If the light source is contained in this luminaire (integrated LED), it shall only be replaced by the manufacturer, his service agent, or a similarly qualified person.

INSTALLATION WITHOUT SPIKE

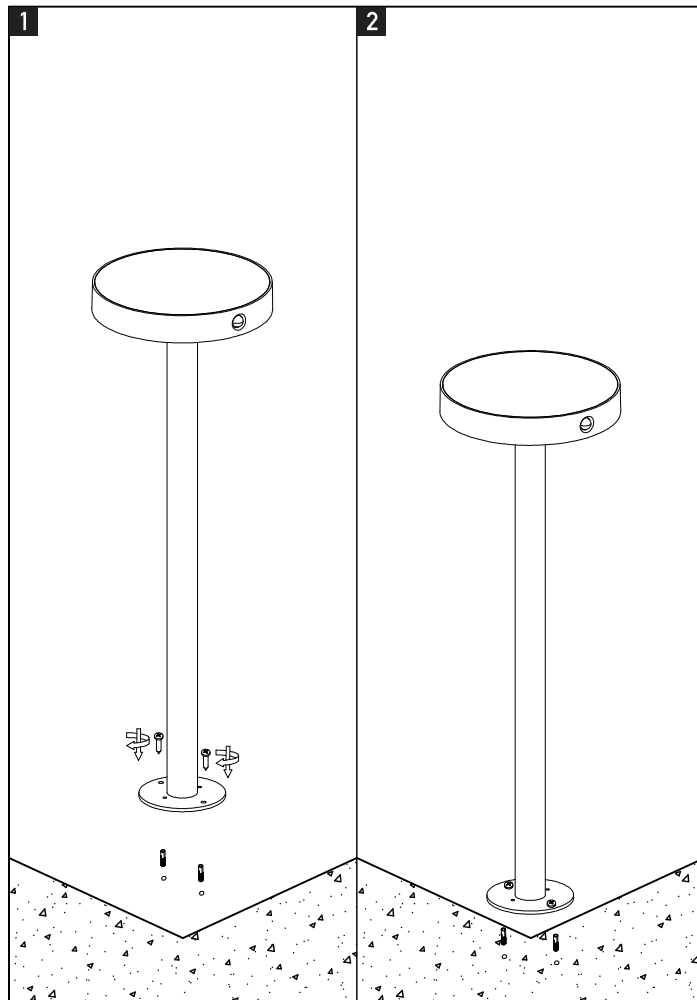

BASE & SPIKE INCLUDED

LIGHTING MODES OVERVIEW

Mode 1 - Dimmable & Motion Sensor

LED operates at 10% brightness when ambient light <20 lux. Upon motion detection, brightness increases to 100% during movement. After 5 hours, standby dims to 5% and motion-triggered output drops to 70%. Turns off when ambient light >20 lux.

Mode 2 - Constant Light & Motion Sensor Disable

Motion sensor disable. LED runs at 50% when ambient light <20 lux. After 2 hours, brightness reduces to 30%. After 5 hours, brightness reduces to 20%. Turns off when ambient light >20 lux.

Mode 3 - Motion Sensor Only

No light at standby. LED activates 100% upon motion detection and stay on for 25 seconds after movements stops. After 5 hours, motion-triggered output reduces to 70%. Turns off automatically when ambient light >20 lux.



OUTDOOR SPIKE LIGHT

E449

Please read instructions before commencing installation and retain for future reference.

SPECIFICATIONS

- **Lamp Type:** LED | 2W | 3000K | CRI 80 | Solar Panel | 3 Lighting Modes
- **Material:** Aluminium | PC Diffuser
- **Ingress Protection:** IP 54 Protection against entry of solid objects greater than 12mm in diameter.

INSTALLATION INSTRUCTIONS


! Electrical products can cause death, injury, or property damage. Maintenance and installation should only be carried out by a professional electrician.

- Ensure the main supply is switched off.
- Follow the instructions step by step.
- Connect the positive and negative ground wires, and connect the power cord.
- Making sure all connections are tight.
- Reconnect power.

WARNING

! Make sure that the products are installed properly before connecting to electricity. Do not cover the luminaire. Do not exceed the maximum wattage rating of the lamp. If the light source is contained in this luminaire (integrated LED), it shall only be replaced by the manufacturer, his service agent, or a similarly qualified person.

INSTALLATION WITH SPIKE

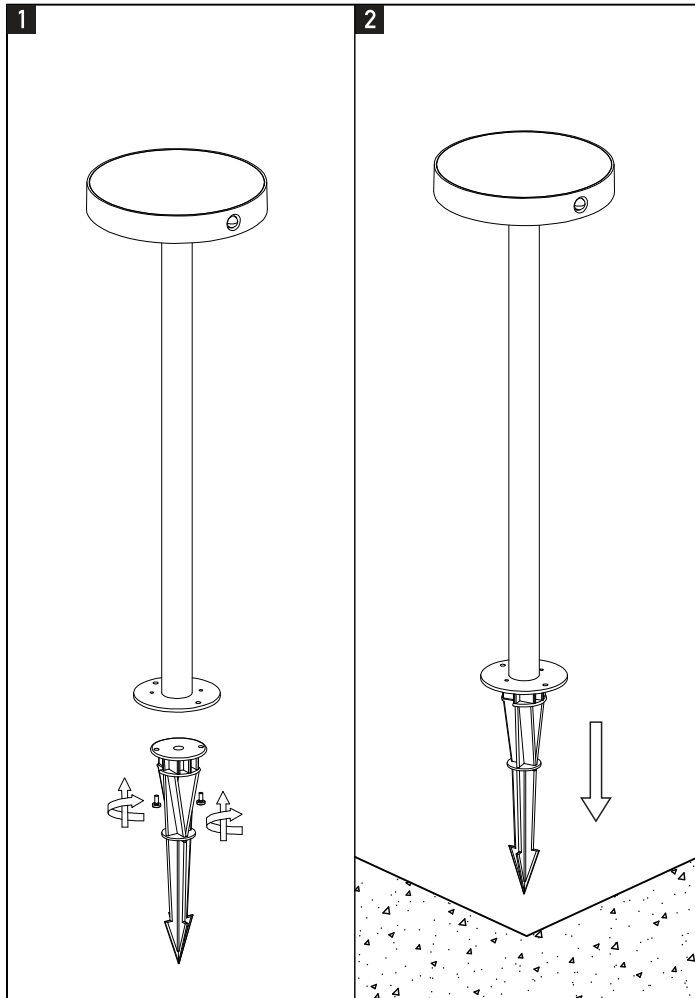

BASE & SPIKE INCLUDED

LIGHTING MODES OVERVIEW

Mode 1 - Dimmable & Motion Sensor

LED operates at 10% brightness when ambient light <20 lux. Upon motion detection, brightness increases to 100% during movement. After 5 hours, standby dims to 5% and motion-triggered output drops to 70%. Turns off when ambient light >20 lux.

Mode 2 - Constant Light & Motion Sensor Disable

Motion sensor disable. LED runs at 50% when ambient light <20 lux. After 2 hours, brightness reduces to 30%. After 5 hours, brightness reduces to 20%. Turns off when ambient light >20 lux.

Mode 3 - Motion Sensor Only

No light at standby. LED activates 100% upon motion detection and stay on for 25 seconds after movements stops. After 5 hours, motion-triggered output reduces to 70%. Turns off automatically when ambient light >20 lux.