IP65 SURFACE LIGHTING SYSTEM 48V OUTDOOR

Please read instructions before commencing installation and retain for future reference.

⚠ Electrical products can cause death, injury, or property damage.
Maintenance and installation should only be carried out
by a professional electrician.

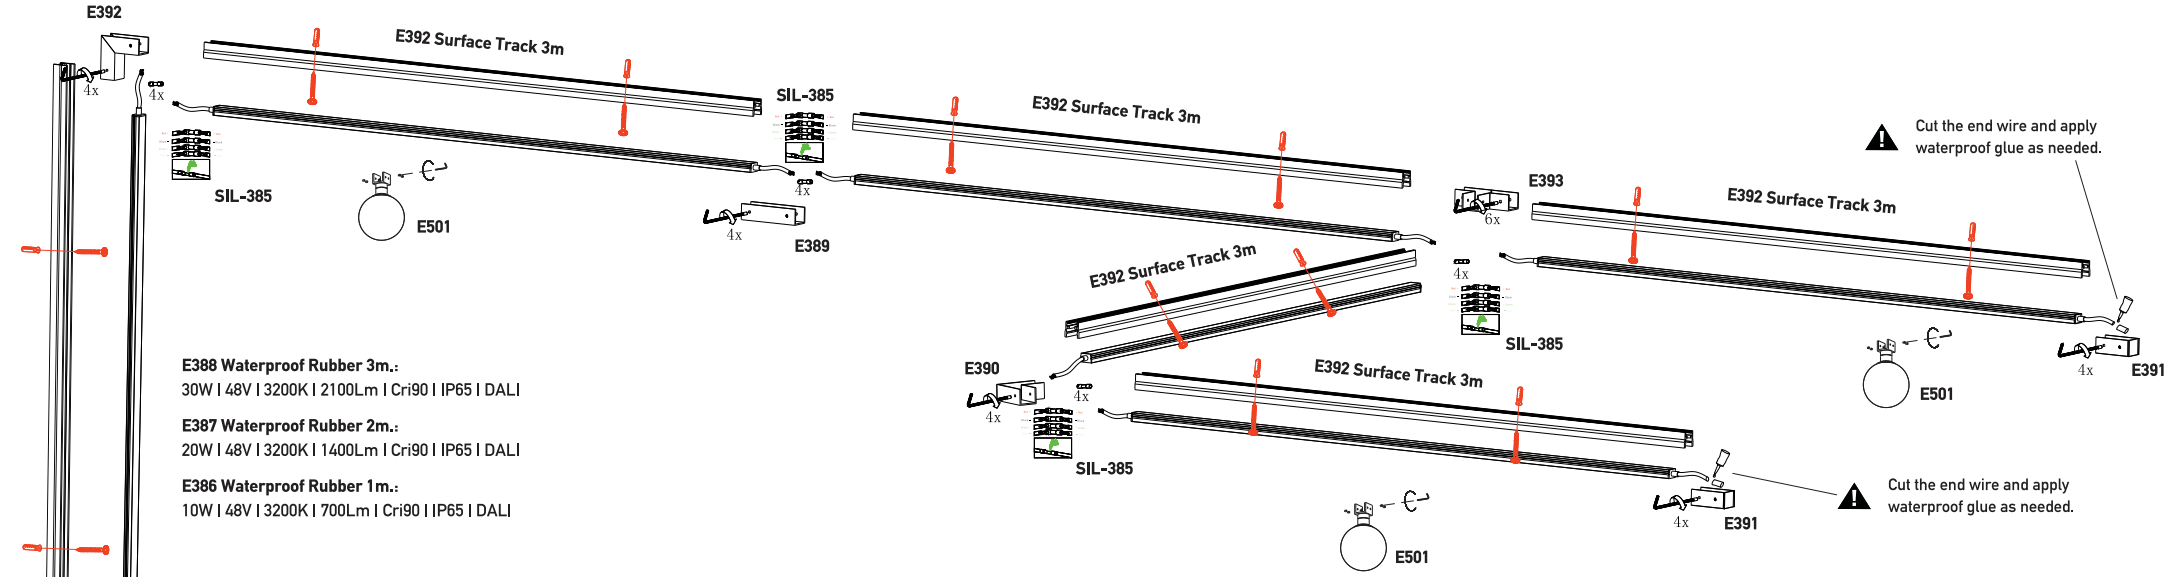

E388 Waterproof Rubber 3m.:
30W I 48V I 3200K I 2100Lm I Cri90 I IP65 I DALI

E387 Waterproof Rubber 2m.:
20W I 48V I 3200K I 1400Lm I Cri90 I IP65 I DALI

E386 Waterproof Rubber 1m.:
10W I 48V I 3200K I 700Lm I Cri90 I IP65 I DALI

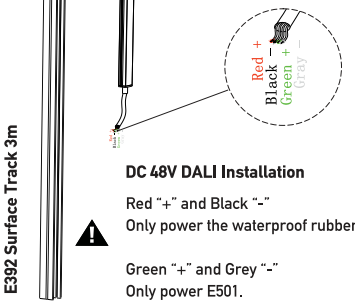

DC 48V DALI Installation

⚠ Red "+" and Black "-"
Only power the waterproof rubber E386, E387, E388.

Green "+" and Grey "-"
Only power E501.



XSV160W48 Installation.: 160W I 48V I IP67 I DALI

⚠ Fits into surface mount box E397
Remote installation

XSV240W48 Installation.: 240W I 48V I IP67 I DALI

⚠ External application
Remote installation

SIL-385 Installation





Fix them with hot air.

E501 Installation.: 9W I 48V I 3200K I 438Lm I CRi80 I IP65 I DALI

⚠ Does not operate independently.
Must be mounted on waterproof rubbers E386, E387, E388.

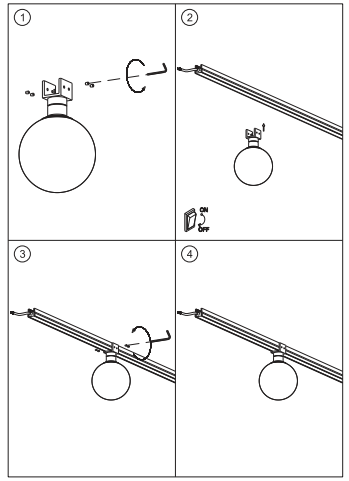

WARNING

⚠ Make sure that the products are installed properly before connecting to electricity.
Do not cover the luminaire.
Do not exceed the maximum wattage rating of the lamp.
If the light source is contained in this luminaire (integrated LED),
it shall only be replaced by the manufacturer, his service agent, or
a similarly qualified person.

DIMMABLE | LED | CRI 80 | CRI 90 | IP 65 | 0,5m

14012026