


RECESSED INSTALLATION

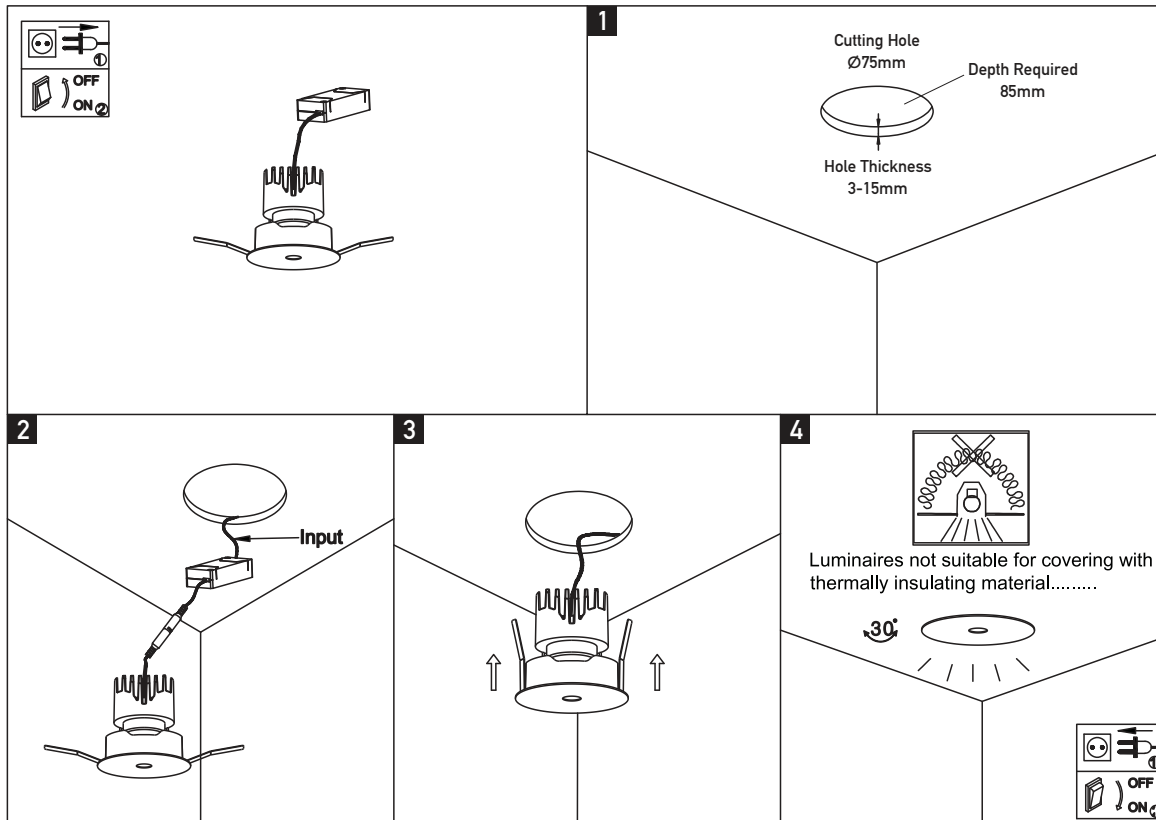

RECOMMENDED DRIVERS

On-Off Driver must be ordered separately with the Code FLS21 for 1 fixture (pass from the hole).
DALI Driver must be ordered separately with the Code FLS12D for 1 fixture (pass from the hole).

INDOOR DOWNLIGHT SPOT

S341

Please read instructions before commencing installation and retain for future reference.

SPECIFICATIONS

- **Lamp Type:** LED | 14W | 3000K | CRI 93 | On-Off | DALI | Beam Angle 36°
- **Material:** Aluminium
- **Ingress Protection:** IP 20 Protection against entry of solid objects greater than 12mm in diameter.

INSTALLATION INSTRUCTIONS

! Electrical products can cause death, injury, or property damage. Maintenance and installation should only be carried out by a professional electrician.

- Ensure the main supply is switched off.
- Follow the instructions step by step.
- Connect the wires and the power cord.
- Making sure all connections are tight.
- Reconnect power.

WARNING

! Make sure that the products are installed properly before connecting to electricity. Do not cover the luminaire. Do not exceed the maximum wattage rating of the lamp. If the light source is contained in this luminaire (integrated LED), it shall only be replaced by the manufacturer, his service agent, or a similarly qualified person. Driver not included, must be order separately.

