



RECESSED BASIC INSTALLATION



S342 / S343

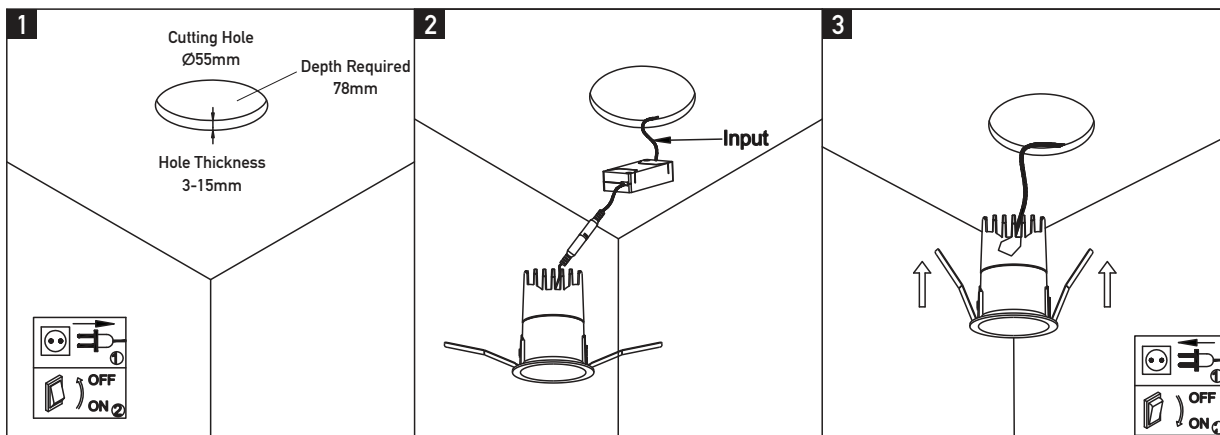

RFLBS342 / RFLWS342
RFLNS342 / RFLGS342



OPTC-S342-15D
beam angle 15°



OPTC-S342-24D
beam angle 24°

RECOMMENDED DRIVERS

On-Off Driver must be ordered separately with the Code FLS21 for 1 fixture (pass from the hole).
DALI Driver must be ordered separately with the Code FLS12D for 1 fixture (pass from the hole).

INDOOR DOWNLIGHT SPOT S343

Please read instructions before commencing installation and retain for future reference.

SPECIFICATIONS

- **Lamp Type:** LED | 11W | 3000K | CRI 93 | DALI | On-Off | Beam Angle 36°
- **Input:** 36V | 250mA
- **Material:** Aluminium
- **Ingress Protection:** IP44 Protection against entry of solid objects greater than 12mm in diameter.

INSTALLATION INSTRUCTIONS


! Electrical products can cause death, injury, or property damage. Maintenance and installation should only be carried out by a professional electrician.

- Ensure the main supply is switched off.
- Follow the instructions step by step.
- Connect the wires and the power cord.
- Making sure all connections are tight.
- Reconnect power.



WARNING

! Make sure that the products are installed properly before connecting to electricity. Do not cover the luminaire with thermally insulating material. Do not exceed the maximum wattage rating of the lamp. If the light source is contained in this luminaire (integrated LED), it shall only be replaced by the manufacturer, his service agent, or a similarly qualified person.





RECESSED ADJUSTABLE INSTALLATION

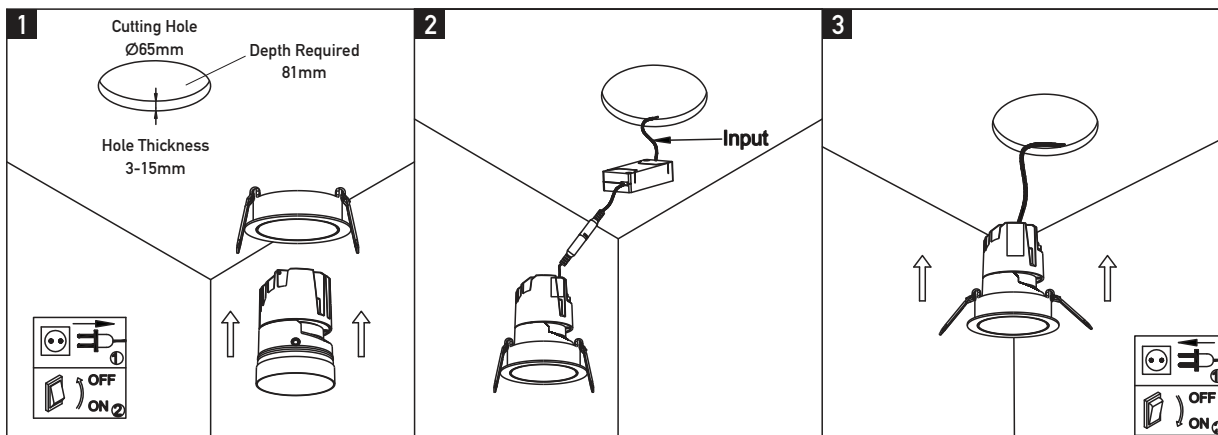

S342 / S343




DAB342 / DAW342



OPTC-S342-15D
beam angle 15°



OPTC-S342-24D
beam angle 24°



RRB342 / RRW342

RECOMMENDED DRIVERS

On-Off Driver must be ordered separately with the Code FLS21 for 1 fixture (pass from the hole).
DALI Driver must be ordered separately with the Code FLS12D for 1 fixture (pass from the hole).

INDOOR DOWNLIGHT SPOT S343

Please read instructions before commencing installation and retain for future reference.

SPECIFICATIONS

- **Lamp Type:** LED | 11W | 3000K | CRI 93 | DALI | On-Off | Beam Angle 36°
- **Input:** 36V | 250mA
- **Material:** Aluminium
- **Ingress Protection:** IP44 Protection against entry of solid objects greater than 12mm in diameter.

INSTALLATION INSTRUCTIONS


! Electrical products can cause death, injury, or property damage. Maintenance and installation should only be carried out by a professional electrician.

- Ensure the main supply is switched off.
- Follow the instructions step by step.
- Connect the wires and the power cord.
- Making sure all connections are tight.
- Reconnect power.



WARNING

! Make sure that the products are installed properly before connecting to electricity. Do not cover the luminaire with thermally insulating material. Do not exceed the maximum wattage rating of the lamp. If the light source is contained in this luminaire (integrated LED), it shall only be replaced by the manufacturer, his service agent, or a similarly qualified person.





RECESSED NON ADJUSTABLE INSTALLATION

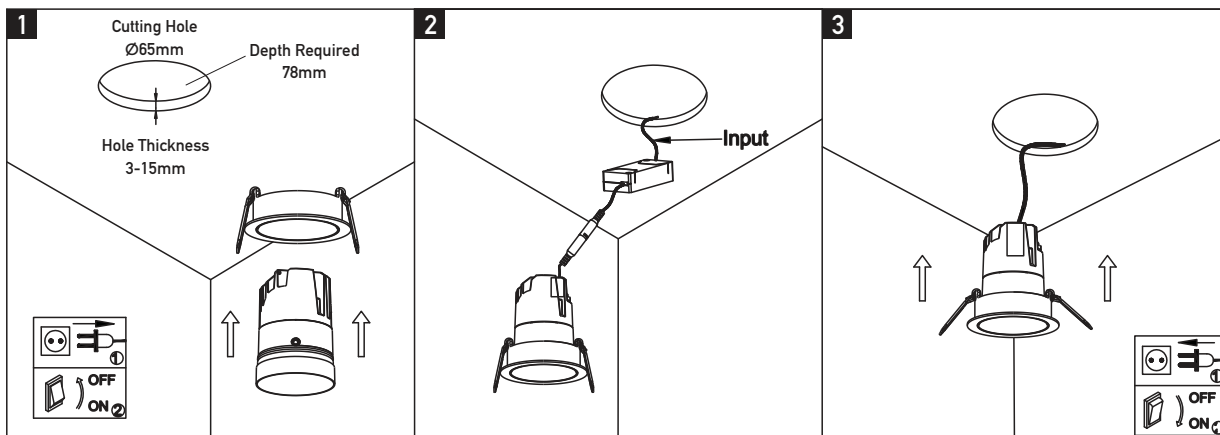

S342 / S343



DFB342 / DFW342 / DFN342
DFBR342 / DFG342



OPTC-S342-15D
beam angle 15°



OPTC-S342-24D
beam angle 24°



RRB342 / RRW342

RECOMMENDED DRIVERS

On-Off Driver must be ordered separately with the Code FLS21 for 1 fixture (pass from the hole).
DALI Driver must be ordered separately with the Code FLS12D for 1 fixture (pass from the hole).

INDOOR DOWNLIGHT SPOT S343

Please read instructions before commencing installation and retain for future reference.

SPECIFICATIONS

- **Lamp Type:** LED | 11W | 3000K | CRI 93 | DALI | On-Off | Beam Angle 36°
- **Input:** 36V | 250mA
- **Material:** Aluminium
- **Ingress Protection:** IP44 Protection against entry of solid objects greater than 12mm in diameter.

INSTALLATION INSTRUCTIONS


! Electrical products can cause death, injury, or property damage. Maintenance and installation should only be carried out by a professional electrician.

- Ensure the main supply is switched off.
- Follow the instructions step by step.
- Connect the wires and the power cord.
- Making sure all connections are tight.
- Reconnect power.



WARNING

! Make sure that the products are installed properly before connecting to electricity. Do not cover the luminaire with thermally insulating material. Do not exceed the maximum wattage rating of the lamp. If the light source is contained in this luminaire (integrated LED), it shall only be replaced by the manufacturer, his service agent, or a similarly qualified person.





TRIMLESS ADJUSTABLE INSTALLATION

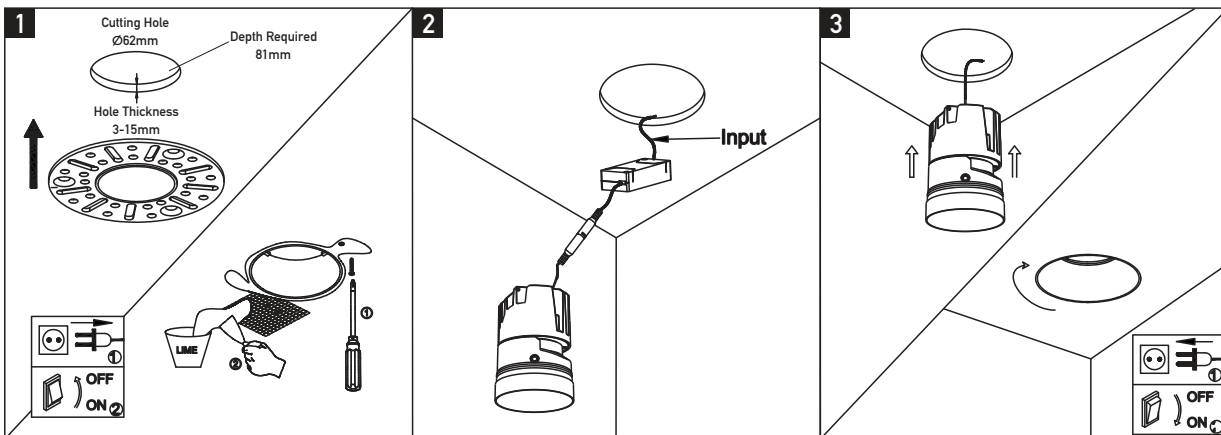

S342 / S343



DAB342 / DAW342



OPTC-S342-15D
beam angle 15°



OPTC-S342-24D
beam angle 24°



TRML342

RECOMMENDED DRIVERS

On-Off Driver must be ordered separately with the Code FLS21 for 1 fixture (pass from the hole).
DALI Driver must be ordered separately with the Code FLS12D for 1 fixture (pass from the hole).

INDOOR DOWNLIGHT SPOT S343

Please read instructions before commencing installation and retain for future reference.

SPECIFICATIONS

- **Lamp Type:** LED | 11W | 3000K | CRI 93 | DALI | On-Off | Beam Angle 36°
- **Input:** 36V | 250mA
- **Material:** Aluminium
- **Ingress Protection:** IP44 Protection against entry of solid objects greater than 12mm in diameter.

INSTALLATION INSTRUCTIONS


! Electrical products can cause death, injury, or property damage. Maintenance and installation should only be carried out by a professional electrician.

- Ensure the main supply is switched off.
- Follow the instructions step by step.
- Connect the wires and the power cord.
- Making sure all connections are tight.
- Reconnect power.



WARNING

! Make sure that the products are installed properly before connecting to electricity. Do not cover the luminaire with thermally insulating material. Do not exceed the maximum wattage rating of the lamp. If the light source is contained in this luminaire (integrated LED), it shall only be replaced by the manufacturer, his service agent, or a similarly qualified person.





TRIMLESS NON ADJUSTABLE INSTALLATION

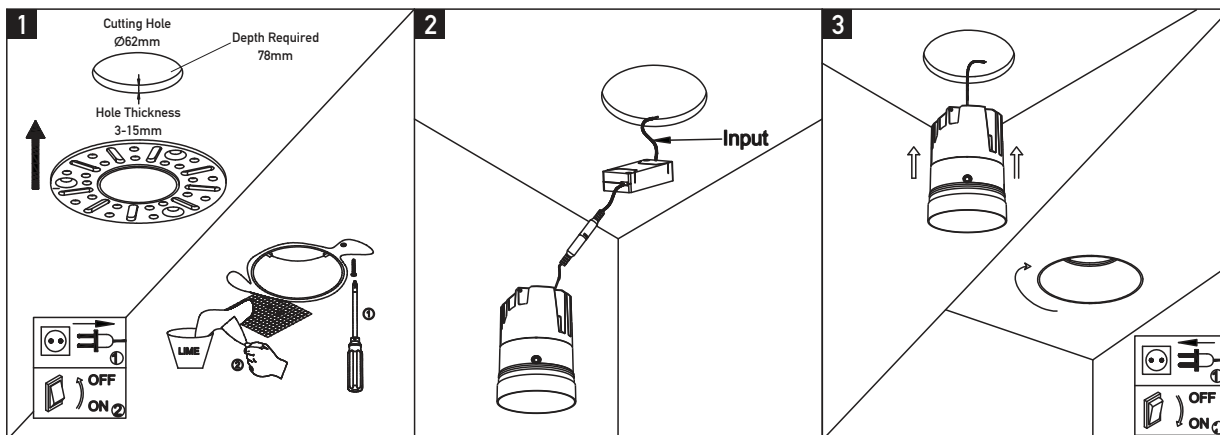

S342 / S343



DFB342 / DFW342 / DFN342
DFBR342 / DFG342



OPTC-S342-15D
beam angle 15°



OPTC-S342-24D
beam angle 24°



TRML342

RECOMMENDED DRIVERS

On-Off Driver must be ordered separately with the Code FLS21 for 1 fixture (pass from the hole).
DALI Driver must be ordered separately with the Code FLS12D for 1 fixture (pass from the hole).

INDOOR DOWNLIGHT SPOT S343

Please read instructions before commencing installation and retain for future reference.

SPECIFICATIONS

- **Lamp Type:** LED | 11W | 3000K | CRI 93 | DALI | On-Off | Beam Angle 36°
- **Input:** 36V | 250mA
- **Material:** Aluminium
- **Ingress Protection:** IP44 Protection against entry of solid objects greater than 12mm in diameter.

INSTALLATION INSTRUCTIONS

! Electrical products can cause death, injury, or property damage. Maintenance and installation should only be carried out by a professional electrician.

- Ensure the main supply is switched off.
- Follow the instructions step by step.
- Connect the wires and the power cord.
- Making sure all connections are tight.
- Reconnect power.

WARNING

! Make sure that the products are installed properly before connecting to electricity. Do not cover the luminaire with thermally insulating material. Do not exceed the maximum wattage rating of the lamp. If the light source is contained in this luminaire (integrated LED), it shall only be replaced by the manufacturer, his service agent, or a similarly qualified person.

