Zambelis LIGHTS

48V MAGNETIC TRACK SYSTEM 5MM



Trimless installation, ceiling and wall application__

Please read instructions before commencing installation and retain for future reference.

The trimless magnetic track must be installed between two gypsum board panels.
First, fix the track onto the first gypsum board panel.
Then install the second gypsum board panel and screw it onto the track.
After assembling all components together,
install the complete structure onto the ceiling or wall, secure it properly,
and finish with plastering and painting.

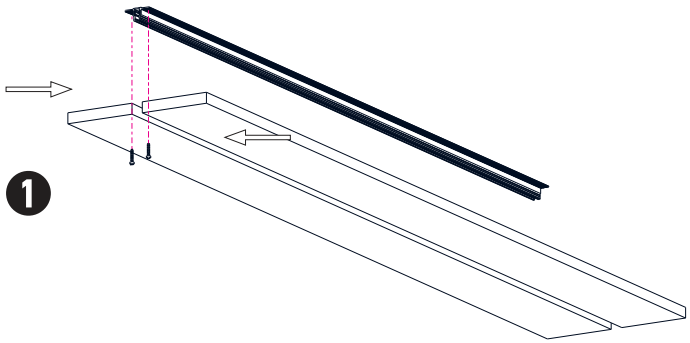

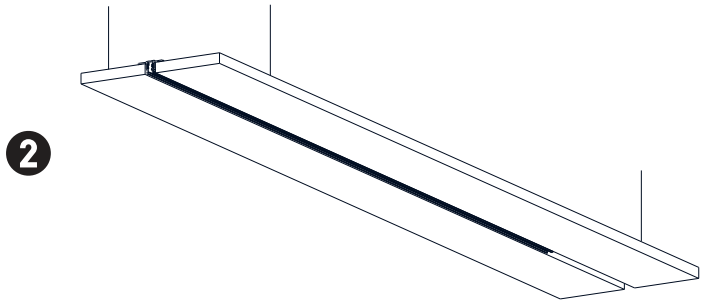

Trimless magnetic track installation in sandwich configuration between two gypsum board panels.

SYSTEM REFERENCE

- **Track Form:** Linear, Curved
- **Installation:** Trimless, Surface, Pendant
- **Material:** Aluminium

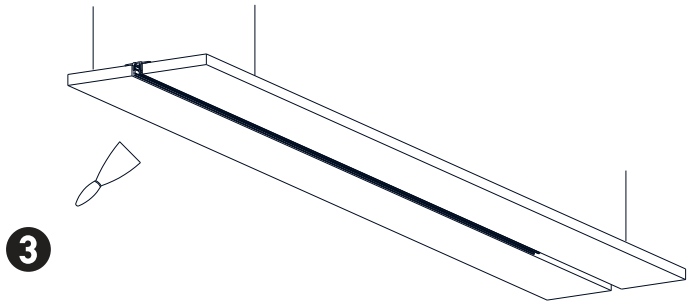

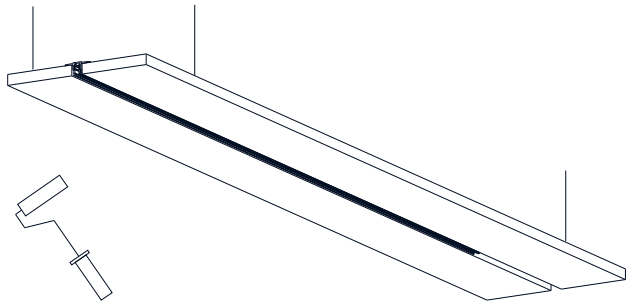

Finish with plastering and painting for a completely trimless result.

LED | CRI 90 | IP 20

03022026

Zambelis LIGHTS

48V MAGNETIC TRACK SYSTEM 5MM



Please read instructions before commencing installation and retain for future reference.

Trimless installation, ceiling and wall application__

Tracks	Length	Color
2504	100cm	Black Matt
2504-W	100cm	White Matt
2505	200cm	Black Matt
2505-W	200cm	White Matt
2506	300cm	Black Matt
2506-W	300cm	White Matt

Corners	Installation	Color
2518	Vertical Inner	Black Matt
2518-W	Vertical Inner	White Matt
2517	Horizontal	Black Matt
2517-W	Horizontal	White Matt
2519	Outer Vertical	Black Matt

Notice: For Corner it is also required to order Flex Connector 2510, 2510-W
Notice: Straight Mechanic Connector included

Connectors	Installation	Color
2520	T Connector	Black Matt
2521	Cross Connector	Black Matt

Notice: For "T" Connector it is also required to order "T" Flex Connector 2509-3D
Notice: For Cross Connector it is also required to order 2pcs of Flex Connector 2510
Notice: Straight Mechanic Connector included

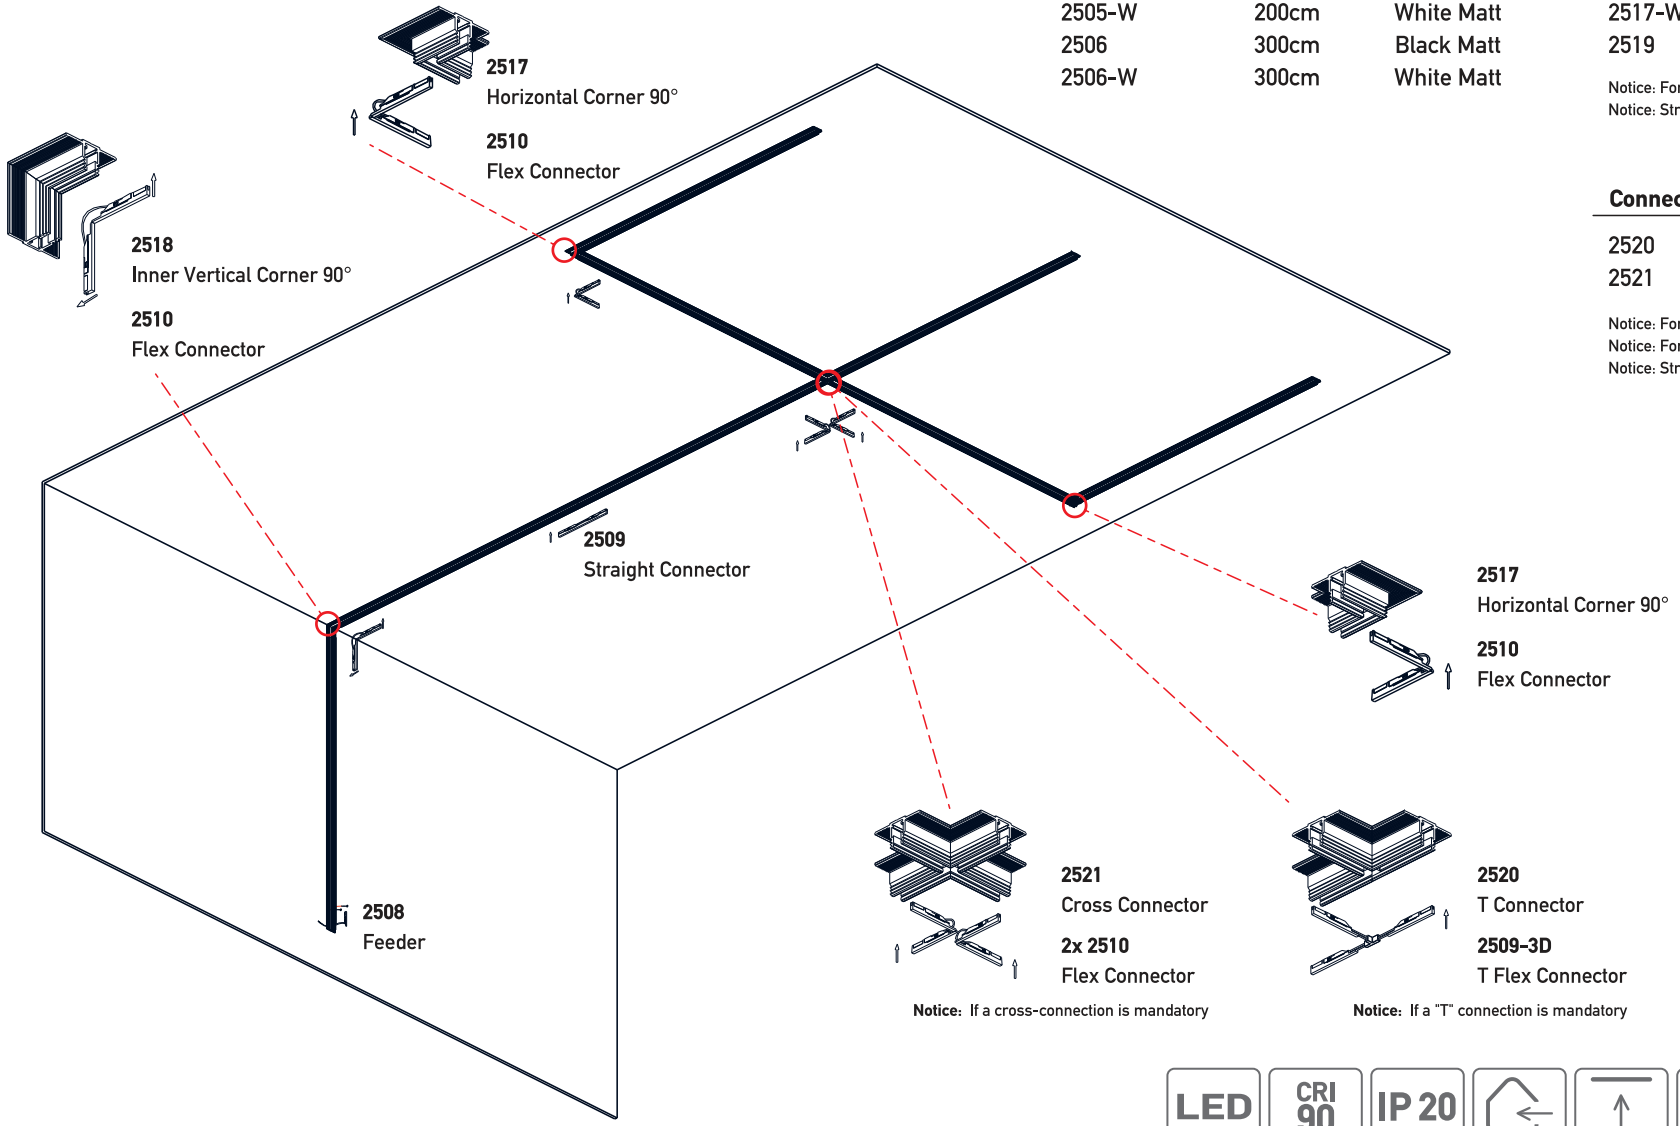

2517
Horizontal Corner 90°
2510
Flex Connector

2521
Cross Connector
2x 2510
Flex Connector

Notice: If a cross-connection is mandatory

2520
T Connector
2509-3D
T Flex Connector

Notice: If a "T" connection is mandatory

LED | CRI 90 | IP 20

03022026

Zambelis LIGHTS

48V MAGNETIC TRACK SYSTEM 5MM

Please read instructions before commencing installation and retain for future reference.

Surface installation, ceiling and wall application__

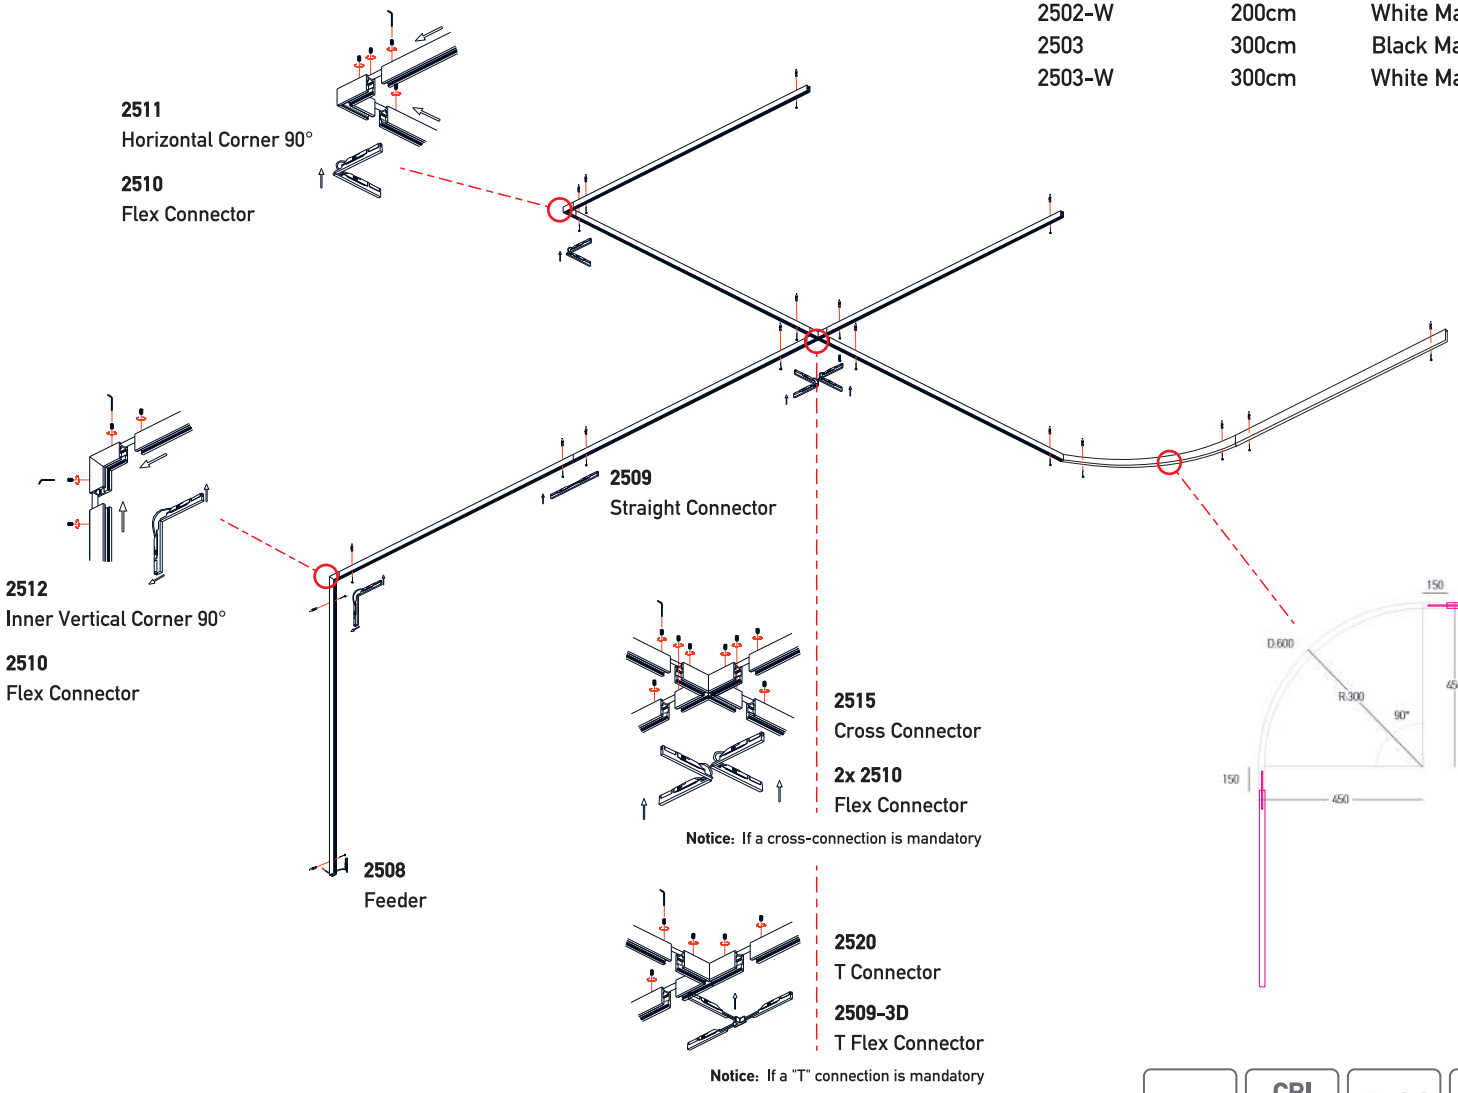

Tracks	Length	Color
2501	100cm	Black Matt
2501-W	100cm	White Matt
2502	200cm	Black Matt
2502-W	200cm	White Matt
2503	300cm	Black Matt
2503-W	300cm	White Matt

Corners	Installation	Color
2512	Vertical Inner	Black Matt
2512-W	Vertical Inner	White Matt
2511	Horizontal	Black Matt
2511-W	Horizontal	White Matt
2513	Outer Vertical	Black Matt

Notice: For Corner it is also required to order Flex Connector 2510, 2510-W
Notice: Straight Mechanic Connector included

Connectors	Installation	Color
2514	T Connector	Black Matt
2521	Cross Connector	Black Matt

Notice: For "T" Connector it is also required to order "T" Flex Connector 2509-3D
Notice: For Cross Connector it is also required to order 2pcs of Flex Connector 2510
Notice: Straight Mechanic Connector included

Curved Track	Length	Color
25162	Ø60 L: 52,1cm	Black Matt
25166	Ø60 L: 52,1cm	White Matt

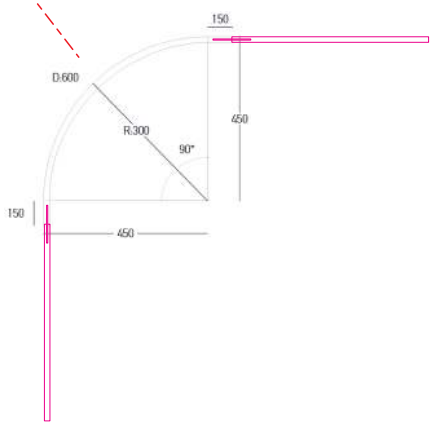

LED | CRI 90 | IP 20

03022026

Zambelis LIGHTS

48V MAGNETIC TRACK SYSTEM 5MM



Please read instructions before commencing installation and retain for future reference.

Pendant installation__

For pendant installation it also required to order Suspension Kit 2516, Ceiling Base 23280 and Feeder 2508-2M

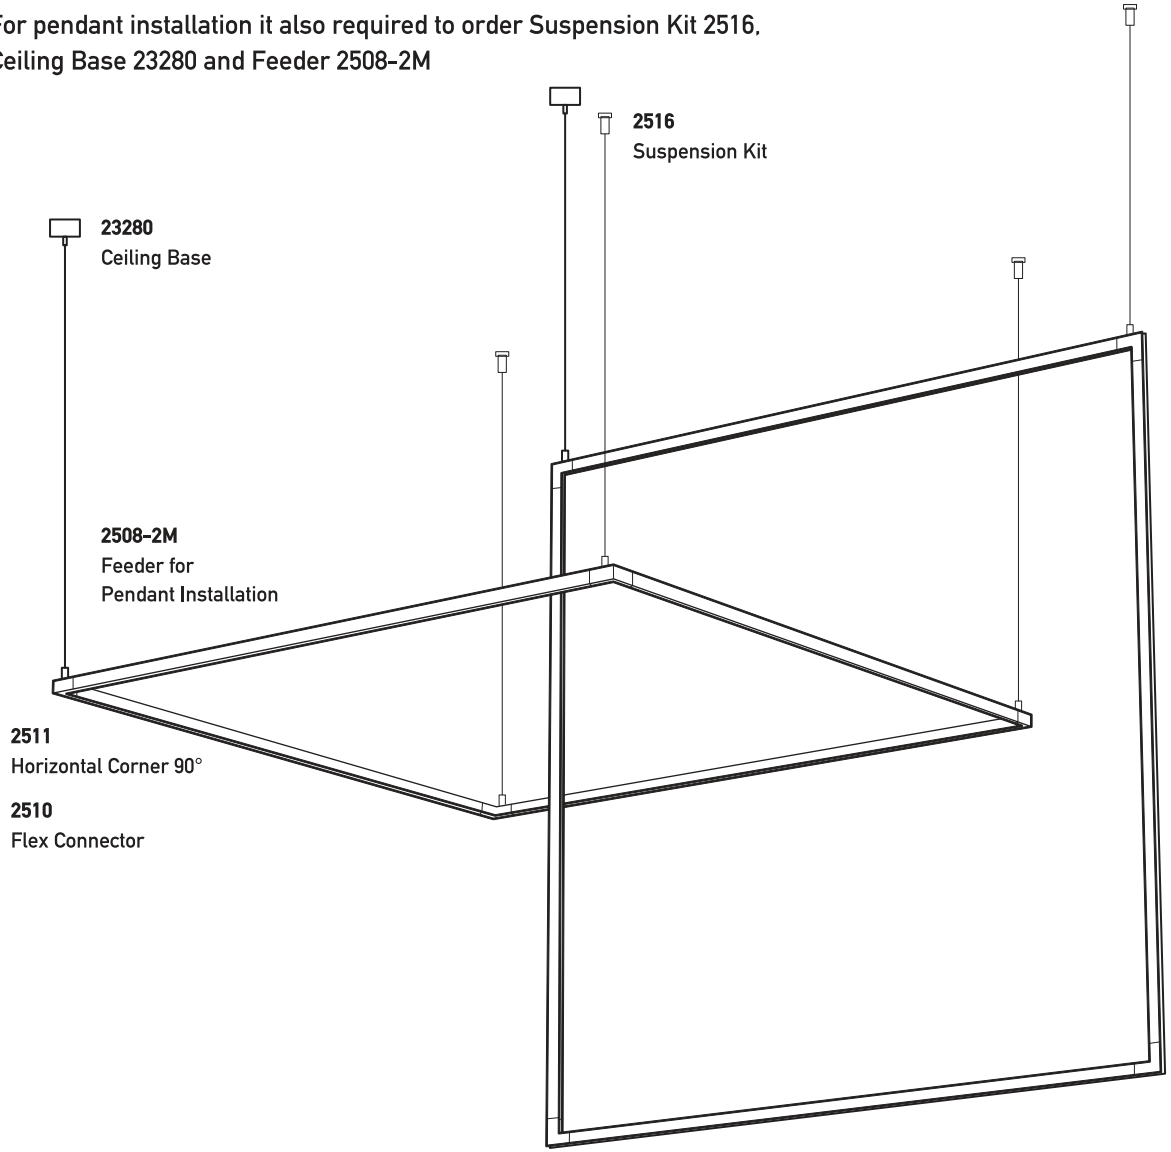

Tracks	Length	Color
2501	100cm	Black Matt
2501-W	100cm	White Matt
2502	200cm	Black Matt
2502-W	200cm	White Matt
2503	300cm	Black Matt
2503-W	300cm	White Matt

Corners	Installation	Color
2512	Vertical Inner	Black Matt
2512-W	Vertical Inner	White Matt
2511	Horizontal	Black Matt
2511-W	Horizontal	White Matt
2513	Outer Vertical	Black Matt

Notice: For Corner it is also required to order Flex Connector 2510, 2510-W
Notice: Straight Mechanic Connector included

Connectors	Installation	Color
2514	T Connector	Black Matt
2521	Cross Connector	Black Matt

Notice: For "T" Connector it is also required to order "T" Flex Connector 2509-3D
Notice: For Cross Connector it is also required to order 2pcs of Flex Connector 2510
Notice: Straight Mechanic Connector included

LED | CRI 90 | IP 20

CE

RoHS Compliant

03022026