



Connecting the Terminal Block


Connect main supply (brown - Live, blue - Neutral) into terminal block making sure all connections are tight.

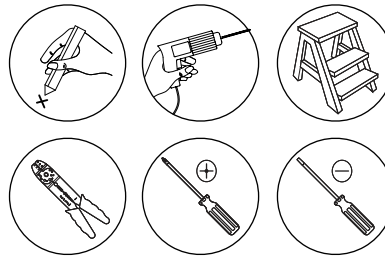


1




2

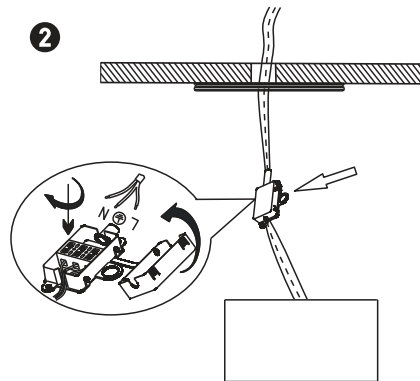

3

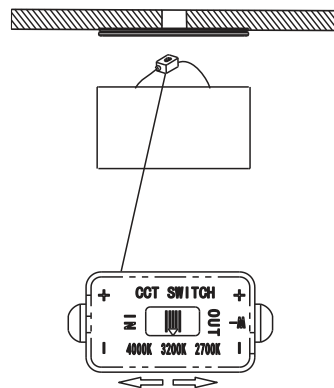

4



INDOOR CEILING SPOT

25215

Please read instructions before commencing installation and retain for future reference.

SPECIFICATIONS

- **Lamp Type:** LED | 12W | 2700K, 3200K, 4000K | CRI 90 | DALI
- **Material:** Aluminium | Microprismatic Diffuser
- **Ingress Protection:** IP44 Protection against entry of solid objects greater than 12mm in diameter.

INSTALLATION INSTRUCTIONS

! Electrical products can cause death, injury, or property damage. Maintenance and installation should only be carried out by a professional electrician.

- Ensure the main supply is turned off.
- Install the mounting anchors on the ceiling.
- Pass the electrical cables through the mounting plate.
- Secure the mounting plate with the self-tapping screws.
- Connect the positive and negative ground wires, then attach the power cord. Make sure all connections are tight.
- Adjust the CCT switch to your preferences.
- Slide the ceiling spot into place and secure it by screwing it onto the mounting base.
- Reconnect the power.

WARNING

! Make sure that the products are installed properly before connecting to electricity. Do not cover the luminaire. Do not exceed the maximum wattage rating of the lamp. If the light source is contained in this luminaire (integrated LED), it shall only be replaced by the manufacturer, his service agent, or a similarly qualified person.

