48V MAGNETIC TRACK SYSTEM 3MM



Please read instructions before commencing installation and retain for future reference.

Trimless 48V Magnetic Track 3MM

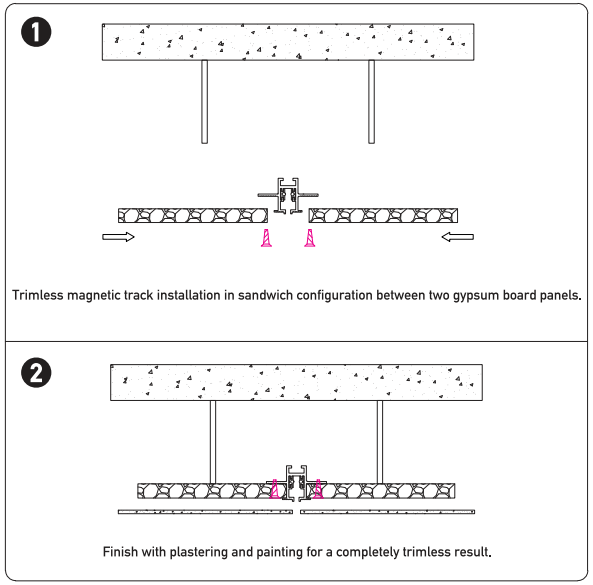

End Caps (2pcs) **25460 | 25460-W**

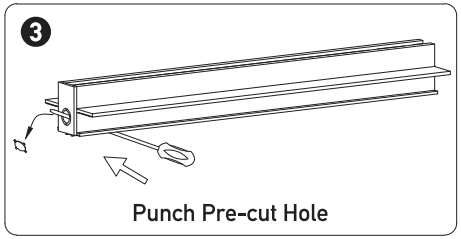

DC 48V Feeder **25131**

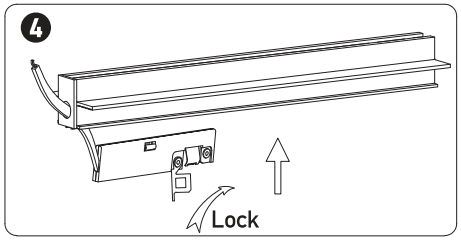

The trimless magnetic track must be installed between two gypsum board panels.
First, fix the track onto the first gypsum board panel.
Then install the second gypsum board panel and screw it onto the track.
After assembling all components together,
install the complete structure onto the ceiling or wall, secure it properly,
and finish with plastering and painting.

Track Code	Length	Color
25128	100cm	Sandy Black
25128-W	100cm	Sandy White
25129	200cm	Sandy Black
25129-W	200cm	Sandy White
25130	300cm	Sandy Black
25130-W	300cm	Sandy White

Corner Code	Installation	Color
25134	Vertical Inner	Sandy Black
25134-W	Vertical Inner	Sandy White
25133	Horizontal	Sandy Black
25133-W	Horizontal	Sandy White
25135	Vertical Outer	Sandy Black

Notice: Flex Connector and Straight Mechanic Connector Included

Straight Mechanic Connector Included

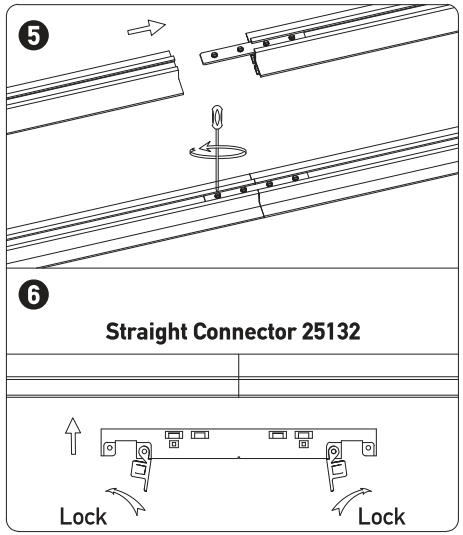

Vertical Inner Corner 90° **25134**

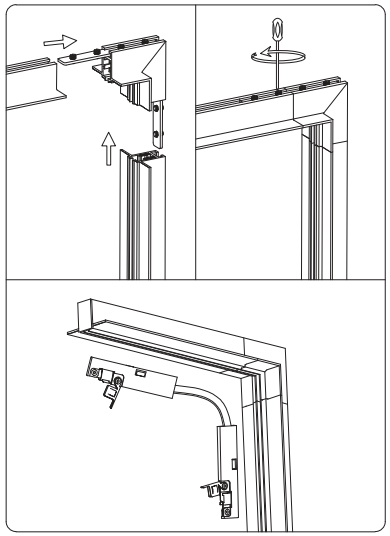

Horizontal Corner 90° **25133**

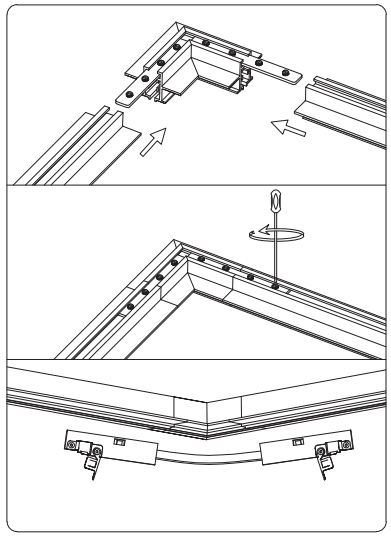

Vertical Outer Corner 90° **25135**

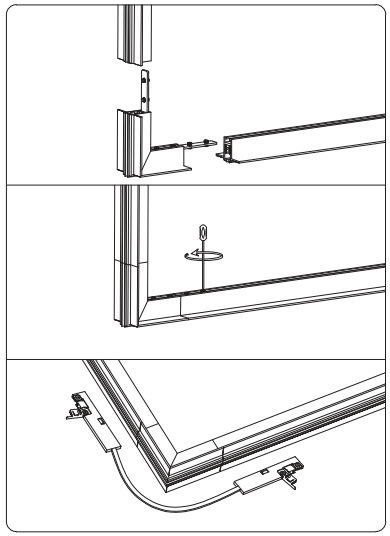

SYSTEM REFERENCE

- **Track Form:** Linear
- **Installation:** Trimless
- **Material:** Aluminium



29012026