



Please read instructions before commencing installation and retain for future reference.

Trimless 48V Magnetic Track 3MM

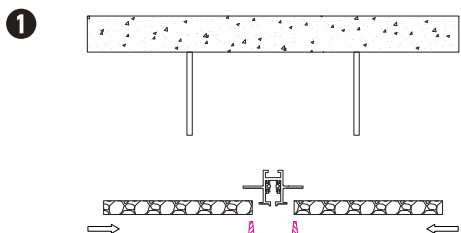


Trimless magnetic track installation in sandwich configuration between two gypsum board panels.

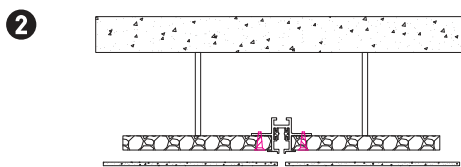


Finish with plastering and painting for a completely trimless result.

End Caps (2pcs) 25460 | 25460-W

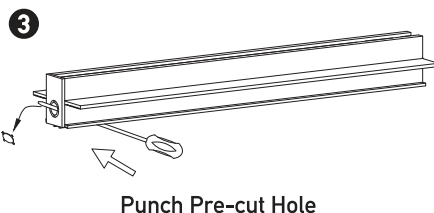

Punch Pre-cut Hole

DC 48V Feeder 25131

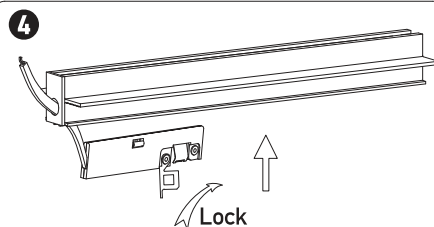

Lock



The trimless magnetic track must be installed between two gypsum board panels. First, fix the track onto the first gypsum board panel. Then install the second gypsum board panel and screw it onto the track. After assembling all components together, install the complete structure onto the ceiling or wall, secure it properly, and finish with plastering and painting.

Track Code	Length	Color
25128	100cm	Sandy Black
25128-W	100cm	Sandy White
25129	200cm	Sandy Black
25129-W	200cm	Sandy White
25130	300cm	Sandy Black
25130-W	300cm	Sandy White

Corner Code	Installation	Color
25134	Vertical Inner	Sandy Black
25134-W	Vertical Inner	Sandy White
25133	Horizontal	Sandy Black
25133-W	Horizontal	Sandy White
25135	Vertical Outer	Sandy Black

Notice: Flex Connector and Straight Mechanic Connector Included

Straight Mechanic Connector Included

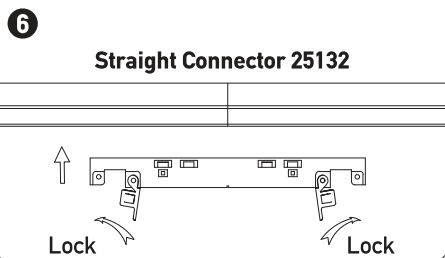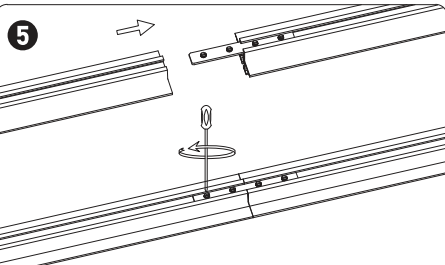


Straight Connector 25132


Lock

Lock


Vertical Inner Corner 90° 25134

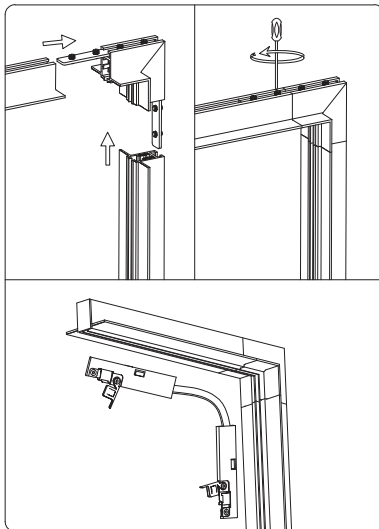

Horizontal Corner 90° 25133

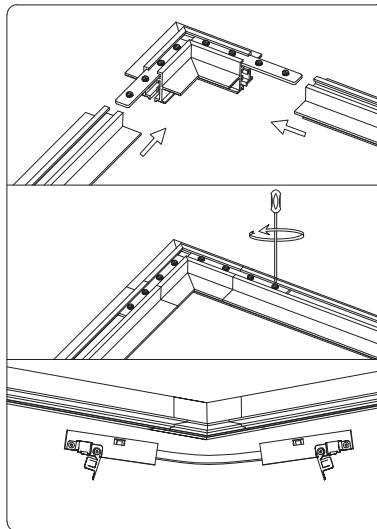

Vertical Outer Corner 90° 25135

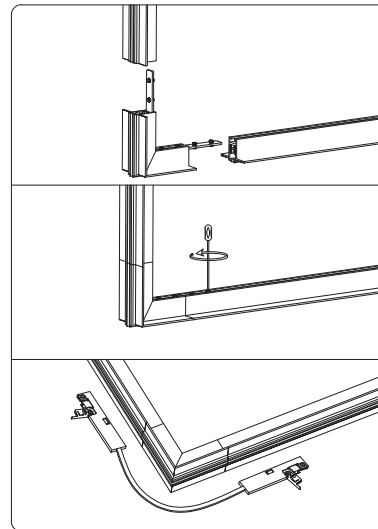

SYSTEM REFERENCE

- Track Form: Linear
- Installation: Trimless
- Material: Aluminium

LED IP 20

CRI 90 CRI 80

