


Product Data Sheet

Date: 16/12/2025
Zambelis Lights

Code 25402

Color: Brass Matt



Physical Specifications

Luminaire Type	Downlight LED Spots
Color	Brass Matt
Material	Aluminium
IP	20
Installation	Recessed - Trimless
Warranty	3 Years

Illumination Data

Color Temperature	3000K
Cri	90
Lumen Output	683Lm
Beam Angle	36°
UGR	<16
Energy Efficiency Class	E
Indicative Lifetime	L70B50 30000H
Mc Adam	SDCM<1.1

Packing Info

Package Size	L: 10cm W: 5cm H: 6.5cm
Gross Weight	0.2kg

Dimensions Reference

Overall Dimensions	Ø: 4.4cm H: 8cm
Cable & Wires	N/A
Cutting Hole	N/A
Depth Required	8.4cm

Electrical Specifications

Input Voltage	36V
Input Current	300mA
Power	12W
Suggested On-Off Driver	FLS21 for 1 Fixture (remote application)
Suggested DALI Driver	FLS12D for 1 Fixture (remote application)
Light Source	LED built in
Dimming Options	Optional (On-Off, DALI)
Safety Class	III


Product Description

Downlight LED Spot 12W 3000K
Brass Matt Aluminium (Driver Not Included)

Accessories For Recessed & Trimless Installation


Code 25404

Color: Sandy Black




Code 25405

Color: Sandy White





Code 25406

Color: Sandy White

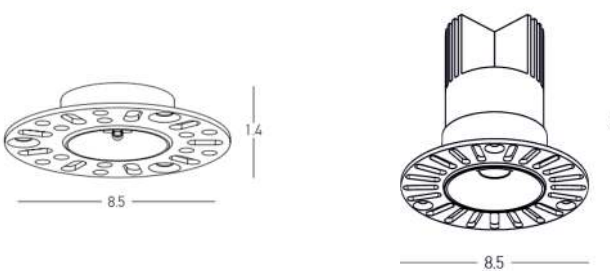

Code 25407

Color: Sandy White

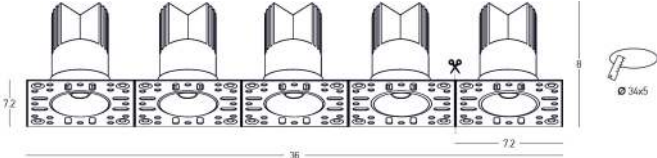

Physical Specifications & Dimensions

Accessory Type	Recessed Cover
Material	Aluminium
IP	20
Dimensions	Ø: 5.7cm H: 2.1cm
Cable & Wires	None
Cutting Hole	Ø: 5.3cm
Depth Required	8cm

Packing Info

Package Size	L: 6.5cm W: 5.5cm H: 5.5cm
Gross Weight	0.1kg

Physical Specifications & Dimensions

Accessory Type	Trimless Cover
Material	Aluminium
IP	20
Dimensions	Ø: 8.5cm H: 1.4cm
Cable & Wires	None
Cutting Hole	Ø: 6cm
Depth Required	8cm

Packing Info

Package Size	L: 9.5cm W: 9.5cm H: 7cm
Gross Weight	0.1kg

Physical Specifications & Dimensions

Accessory Type	Trimless Cover for 1-5 Spots
Material	Plastic
IP	20
Dimensions	L: 36cm W: 7.2cm H: 1.4cm
Cable & Wires	None
Cutting Hole	34cm x 5cm
Depth Required	8cm

Packing Info

Package Size	L: 40cm W: 8cm H: 4cm
Gross Weight	0.1kg



CODE	mA	Watt	V
FLS21	150-500	21	10-42



CODE	mA	Watt	V
FLS12D	120-350	12	9-42



5 212031 021922

