


Product Data Sheet

Date: 09/04/2026
Zambelis Lights



Code 25289-27

Color: Copper Matt

Physical Specifications

Luminaire Type	Downlight LED Spots
Color	Copper Matt
Material	Aluminium
IP	20
Installation	Recessed - Trimless
Warranty	3 Years

Illumination Data

Color Temperature	2700K
Cri	90
Lumen Output	339Lm
Beam Angle	36°
UGR	<16
Energy Efficiency Class	G
Indicative Lifetime	L70B50 30000H
Mc Adam	SDCM<1.7

Packing Info

Package Size	L: 4.5cm W: 4.5cm H: 11cm
Gross Weight	0.15kg

Dimensions Reference

Overall Dimensions	Ø: 2.6cm H: 8.1cm
Cable & Wires	N/A
Cutting Hole	N/A
Depth Required	8.5cm

Electrical Specifications

Input Voltage	12V
Input Current	500mA
Power	7W
Suggested On-Off Driver	25287 for 1 Fixture (pass from the hole)
Suggested DALI Driver	FLS42D for 1-4 FixtureS (remote application)
Light Source	LED built in
Dimming Options	Optional (On-Off, DALI)
Safety Class	III

Product Description

Downlight LED Spot 7W 2700K
Copper Matt Aluminium (Driver Not Included)

Accessories For Recessed & Trimless Installation


Code 25291

Color: Sandy Black




Code 25292

Color: Sandy White





Code 25293

Color: Sandy White

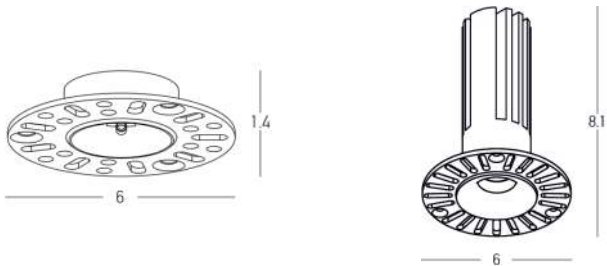

Code 25294

Color: Sandy White

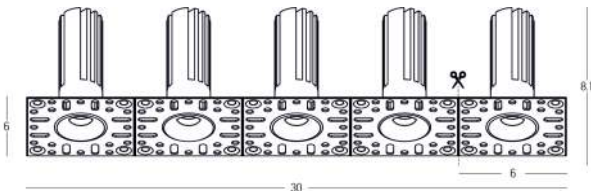

Physical Specifications & Dimensions

Accessory Type	Recessed Cover
Material	Aluminium
IP	20
Dimensions	Ø: 3.7cm H: 1.7cm
Cable & Wires	None
Cutting Hole	Ø: 3.4cm
Depth Required	8.1cm

Packing Info

Package Size	L: 8cm W: 8cm H: 4cm
Gross Weight	0.1kg

Physical Specifications & Dimensions

Accessory Type	Trimless Cover
Material	Aluminium
IP	20
Dimensions	Ø: 6cm H: 1.4cm
Cable & Wires	None
Cutting Hole	Ø: 3.1cm
Depth Required	8.1cm

Packing Info

Package Size	L: 10cm W: 10cm H: 6.5cm
Gross Weight	0.1kg

Physical Specifications & Dimensions

Accessory Type	Trimless Cover for 1-5 Spots
Material	Plastic
IP	20
Dimensions	L: 30cm W: 6cm H: 1.4cm
Cable & Wires	None
Cutting Hole	27.5cm x 4cm
Depth Required	8.1cm

Packing Info

Package Size	L: 30cm W: 10cm H: 5cm
Gross Weight	0.1kg



CODE	mA	Watt	V
25287	500	7	5-12



CODE	mA	Watt	V
FLS42D	150-1050	42	2.5-52

