


ecolight

LED

CRI
90

IP 20

0.5m



LED | 11W | 3000K | 770Lm | Non Dimmable
Included LED Driver 600mA
Material: Aluminium




Please read instructions before commencing installation and retain for future reference.

INSTALLATION INSTRUCTIONS



Electrical products can cause death, injury, or damage to property. Maintenance and installation should only be carried out by a professional electrician.

- Ensure main supply is switched off.
- Cut Out Hole 135 x 35mm and Depth 55mm required into the mounting surface.
- Connect main spot with the appropriate driver, making sure all connections are tight (LED driver 600mA included).
- Move the springs to an upright position.
- Insert the spot into the inside of the hole and return the springs to a vertical position.
- Reconnect power.

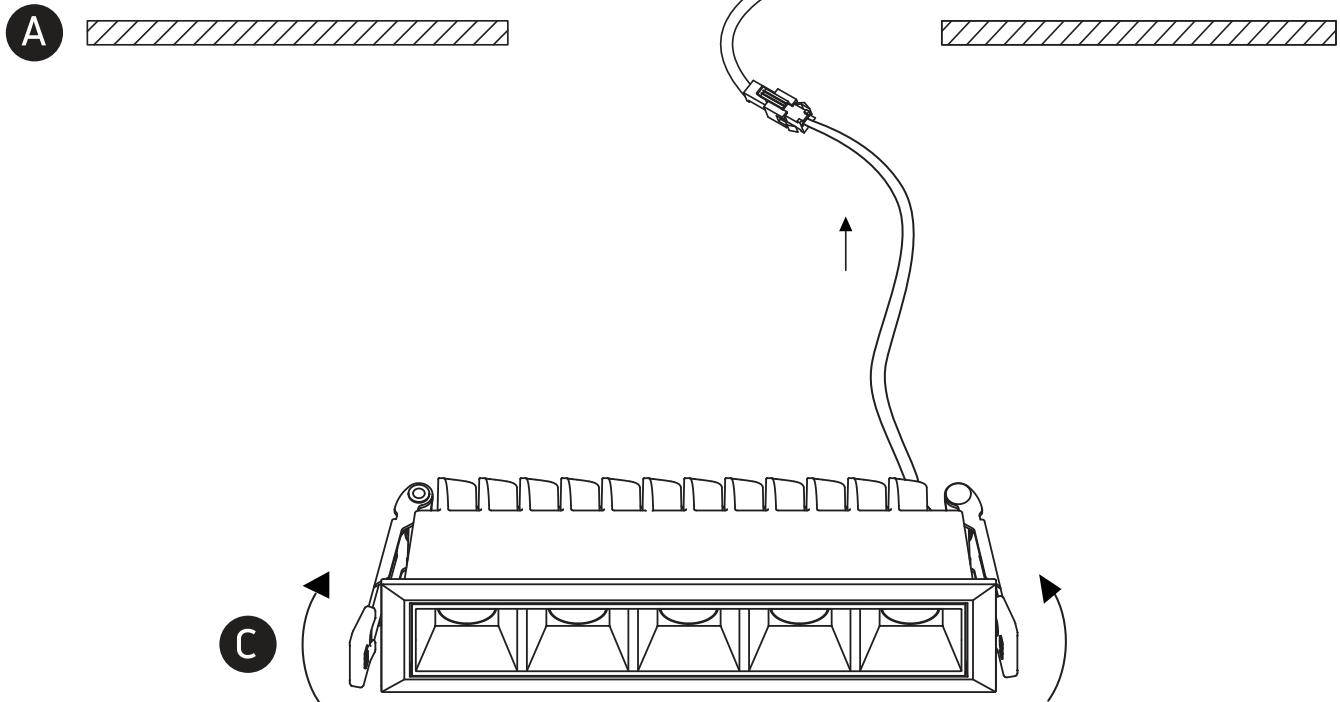

WARNING

- Make sure that the products is installed properly before connecting to electricity.
- Do not cover the fitting.
- Not for outdoor use or in wet conditions.
- Do not exceed the maximum wattage rating of the lamp.

