




Connecting the Terminal Block

Connect main supply (**brown** - Live, **blue** - Neutral) into terminal block making sure all connections are tight.

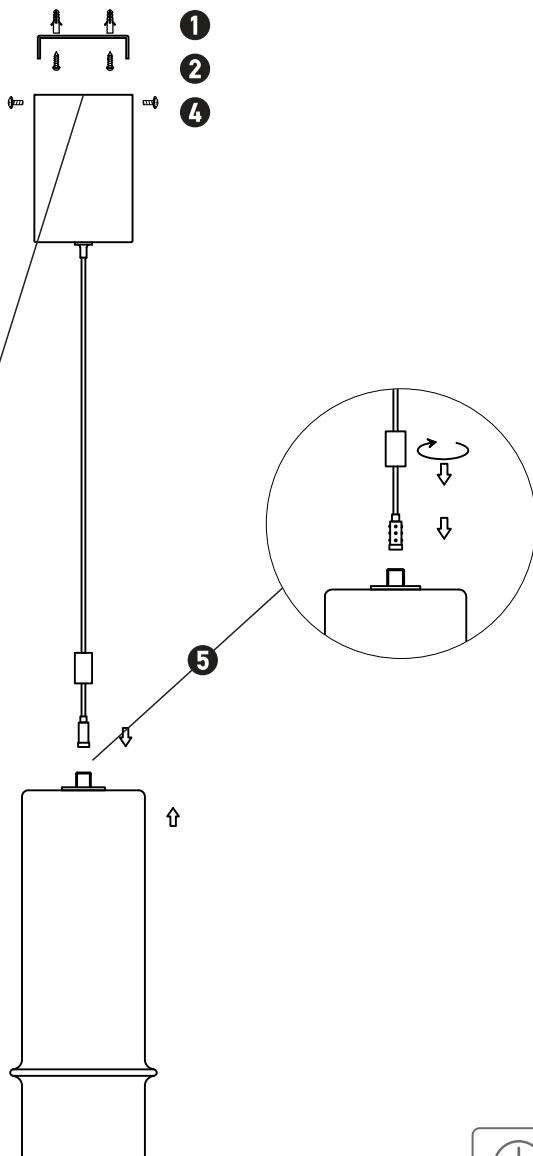

INDOOR PENDANT LIGHT

2533

Please read instructions before commencing installation and retain for future reference.

SPECIFICATIONS

- **Lamp Type:** LED | 6W | 3000K | CRI 90 | Step Dimming
- **Material:** Metal | Glass
- **Ingress Protection:** IP20 Protection against entry of solid objects greater than 12mm in diameter.

INSTALLATION INSTRUCTIONS



Electrical products can cause death, injury, or property damage. Maintenance and installation should only be carried out by a professional electrician.

- Ensure the main power supply is turned off.
- Install the mounting anchors on the ceiling (1).
- Secure the mounting plate using M4 self-tapping screws (2).
- Connect the positive and negative ground wires, then connect the power cord (3). Make sure all connections are tight.
- Slide the decorative ceiling cover upward and secure it with side screws to conceal the wiring and mounting plate (4).
- Connect the cable with the LED ring through the glass and follow the diagram to secure all connections (5).
- Reconnect power.

WARNING



Make sure that the products are installed properly before connecting to electricity. Do not cover the luminaire. Do not exceed the maximum wattage rating of the lamp. If the light source is contained in this luminaire (integrated LED), it shall only be replaced by the manufacturer, his service agent, or a similarly qualified person.



LED

CRI 90

IP 20

0,5m

